



SMSAN

上海巴桑电气有限公司

SHANGHAI BASANG ELECTRIC CO.,LTD

邮 箱: bass258@163.com

网 站: <http://www.smsan.cn>

电 话: 15921452960 / 18221407513

地 址: 上海市奉贤区奉城镇二桥村

Email: bass258@163.com

Website: <http://www.smsan.cn>

Tel: 15921452960 / 18221407513

Address: Erdiao Village, Fengcheng Town, Fengxian District, Shanghai City



上海巴桑官方公众号
Official Accounts



上海巴桑官方微信
WeChat



上海巴桑电气有限公司

SHANGHAI BASANG ELECTRIC CO.,LTD

COMPANY PROFILE


公司简介

上海巴桑电气有限公司始终秉持“创建企业,造就人做出贡献”的愿景,打造品牌。

上海巴桑电气有限公司主业是以“配件”为主题的,主导产品为工业控制机箱、悬臂系统、工业接线盒、拖链、三色灯、机床防护等产品,并且取得国内外客户的广泛好评。产品广泛应用于机床制造、自动化设备、工程机械通用机械制造、汽车生产线、风能设备、光伏设备、新能源设备等领域公司正在缔造更高品质的产品,及追求完备的科学的和管理和服务态度的来满足各类客户的需求。

Shanghai Basang Electric Co., Ltd. always adheres to the vision of "creating an enterprise, cultivating people to make contributions and builds a brand."

Shanghai Basang Electric Co, Ltd, mainly focuses on "accessories" as its main business. its main products include industrial control cabinets, cantilever systems, industrial junction boxes, drag chains, tricolor lights, machine tool protection, and other products and has received widespread praise from domestic and foreign customers. Our products are widely used in the fields of machine tool manufacturing automation equipment, engineering machinery general machinery manufacturing, automotive production lines, wind energy equipment, photovoltaic equipment, new energy equipment, etc. The company is creating higher quality products and pursuing a complete and scientific management and service attitude to meet the needs of various customers.

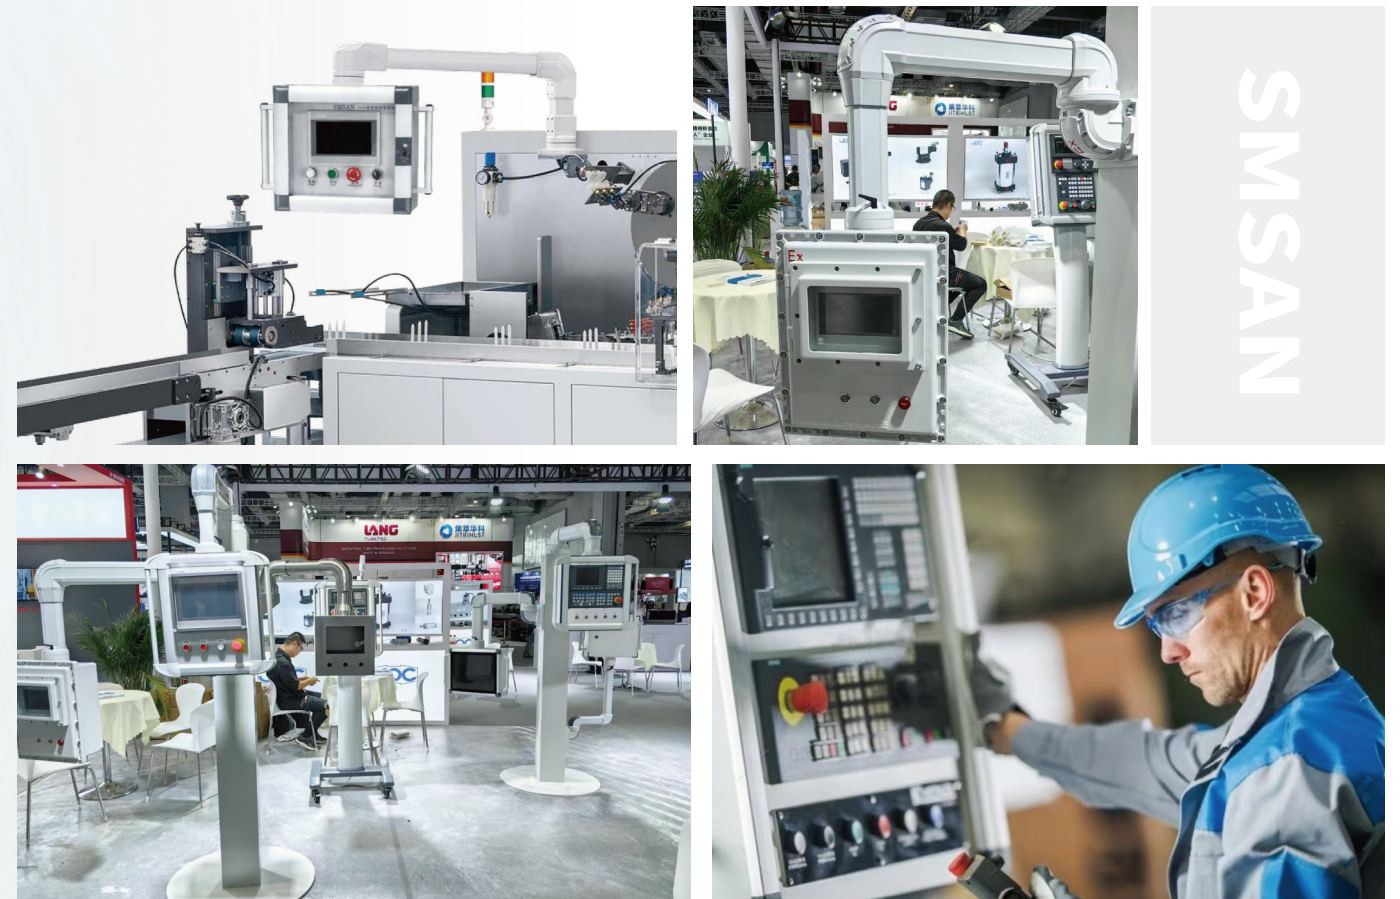

CONTENTS

目录

控制箱系列



CP-1-105-155-200 Series	P01-P02
CP-2-100-150-200 Series	P03-P04
CP-80-130-155-180-210-230-280-330-380-430 Series	P05-P06
CP-140-210 Series	P07-P08
140-210 Front Door Opening Control Box Series	P09-P10
170-230 Front Door Control Box Series	P11-P12
Explosion-proof Control Box Series	P13-P14
Stainless Steel Control Box Series	P15-P16

悬臂组件系列



Telescopic Cantilever	P17-P18
Keyboard Tray Series	P19-P20
Control Box moving bracket	P21-P22
50-65 Lightweight cantilever components	P23-P26
60-95 Medium cantilever components	P27-P30
75-110 Heavy cantilever components	P31-P33



期待与您的合作!

Looking forward to the successful cooperation with you!



控制箱系列-Control Box Series



• CP-1-105-155-200系列控制箱
CP-1-105-155-200 Series Control Box




- 有效安装深度:CP105;CP155;CP200
- 防护等级:后开门:P54;螺钉固定后面板:IP65
- 材料:铝型材和把手:铝合金6063
- 角部件:压铸铝合金
- 把手固定件:压铸铝合金
- Effective installation depth:CP105;CP155;CP200
- Protectionlevel:rear door opening:IP54,Screw fixed rear panel:IP65
- Material:Aluminum profile and handle:Aluminum alloy 6063
- Corner component:Die cast aluminum alloy
- Handle fixing part: die-cast aluminum alloy

面板可根据需求定制!
Panels are customized according to your requirements!

• 结构细节图 Structural detail drawing

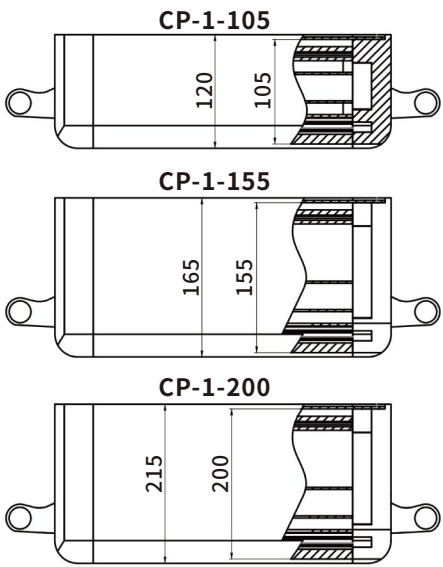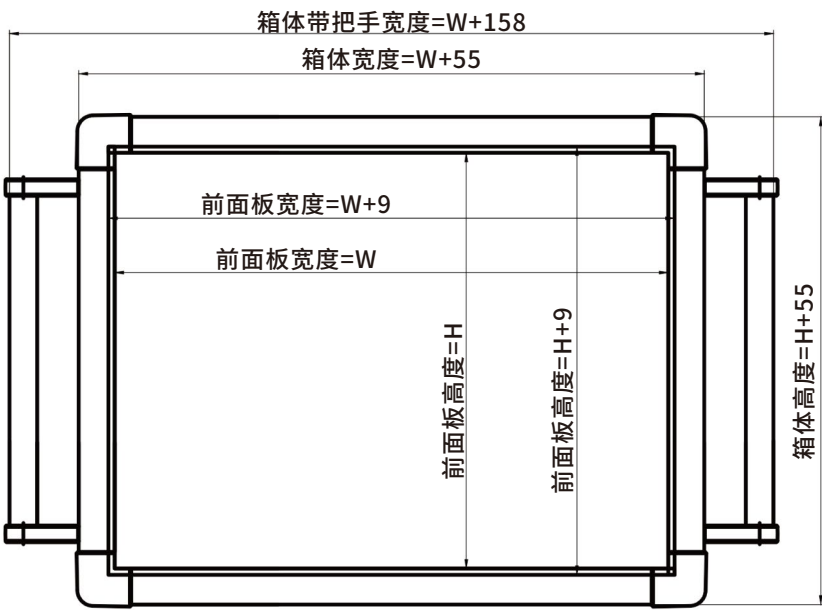

光滑圆角设计
Smooth rounded corner design

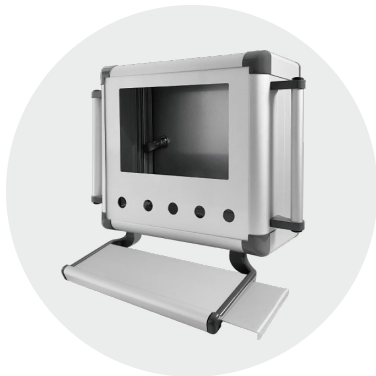


可搭配键盘托
Can be paired with a keyboard stand



可定制面板
Customizable panel

• 安装连接方式 Installation connection method

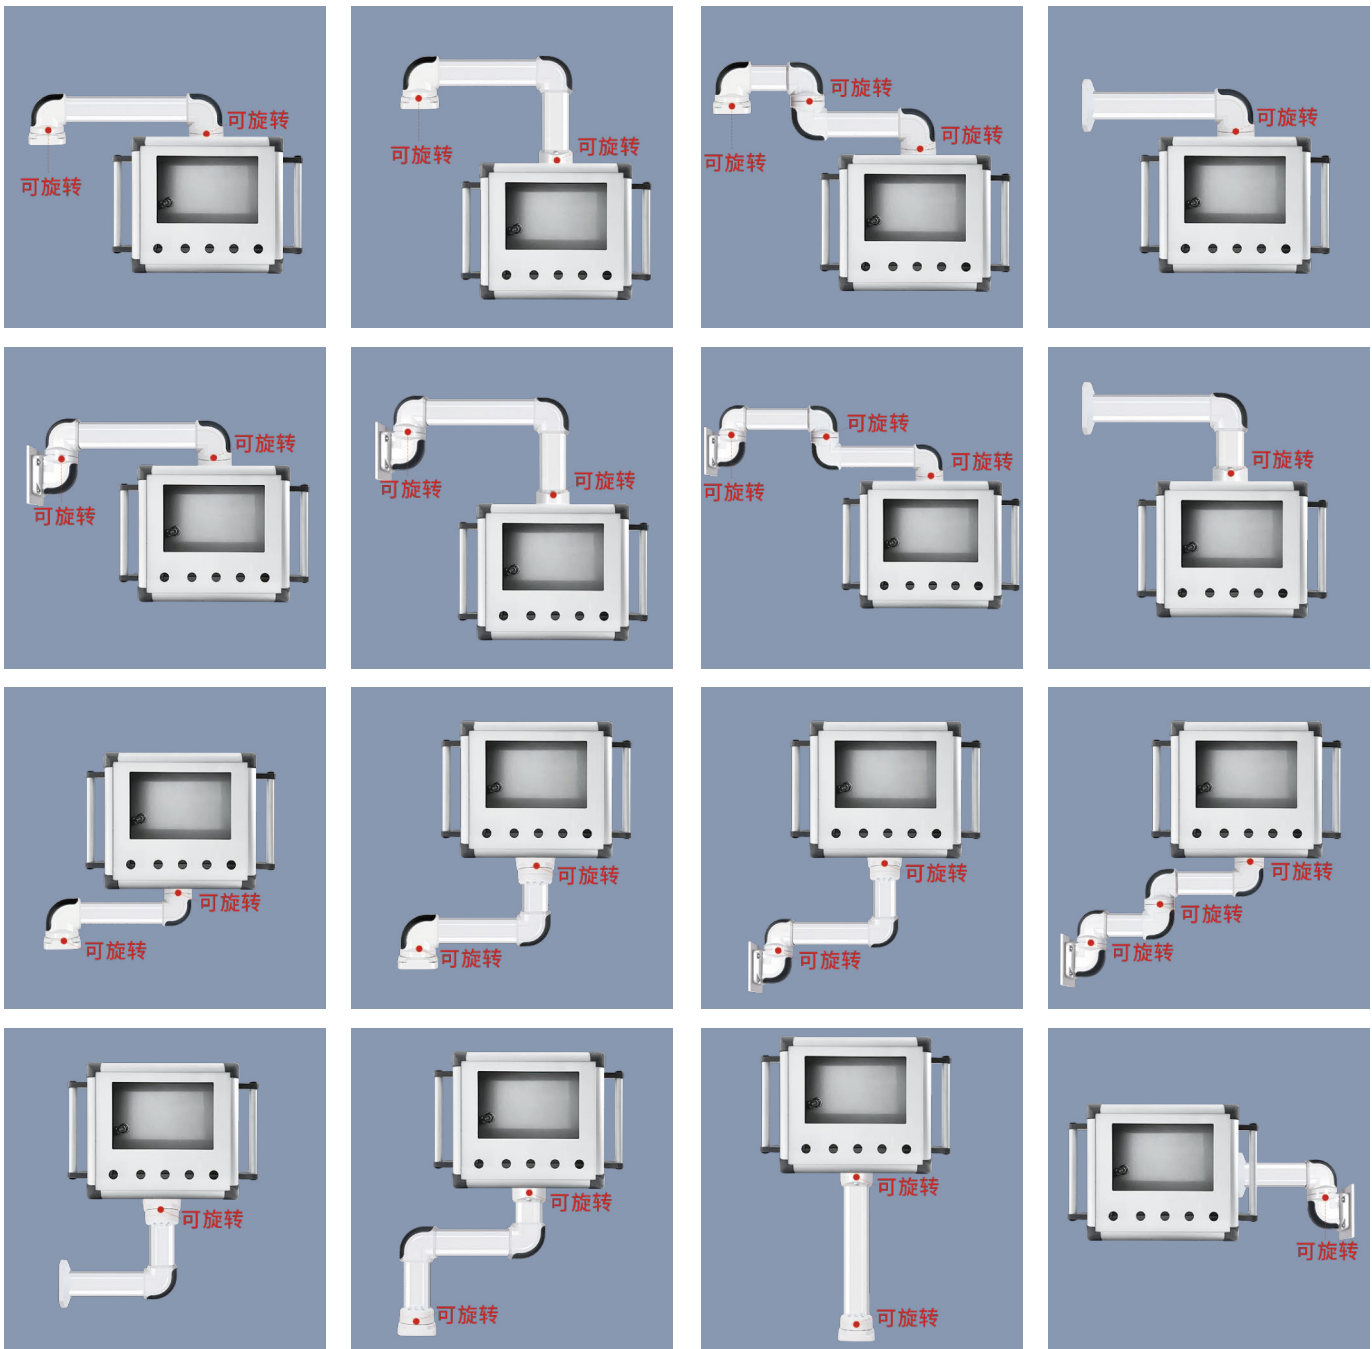

• 应用实例 Application example



控制箱系列-Control Box Series

CP-2-100-150-200系列控制箱 CP-2-100-150-200 Series Control Box



- 有效安装深度:CP100;CP150;CP200
- 防护等级:后开门:IP54;螺钉固定后面板:IP65
- 材料:铝型材和把手:铝合金6063
- 角部件:压铸铝合金
- 把手固定件:压铸铝合金
- Effective installation depth:CP100;CP150;CP200
- Protectionlevel:rear door openingIP54;Screw fixed rear panel:IP65
- Material:Aluminum profile and handle:Aluminum alloy 6063
- Cornercomponent:die-cast aluminum alloy
- Handle fixing part: die-cast aluminum alloy

面板可根据需求定制!


Panels are customized according to your requirements!



结构图 Structural diagram

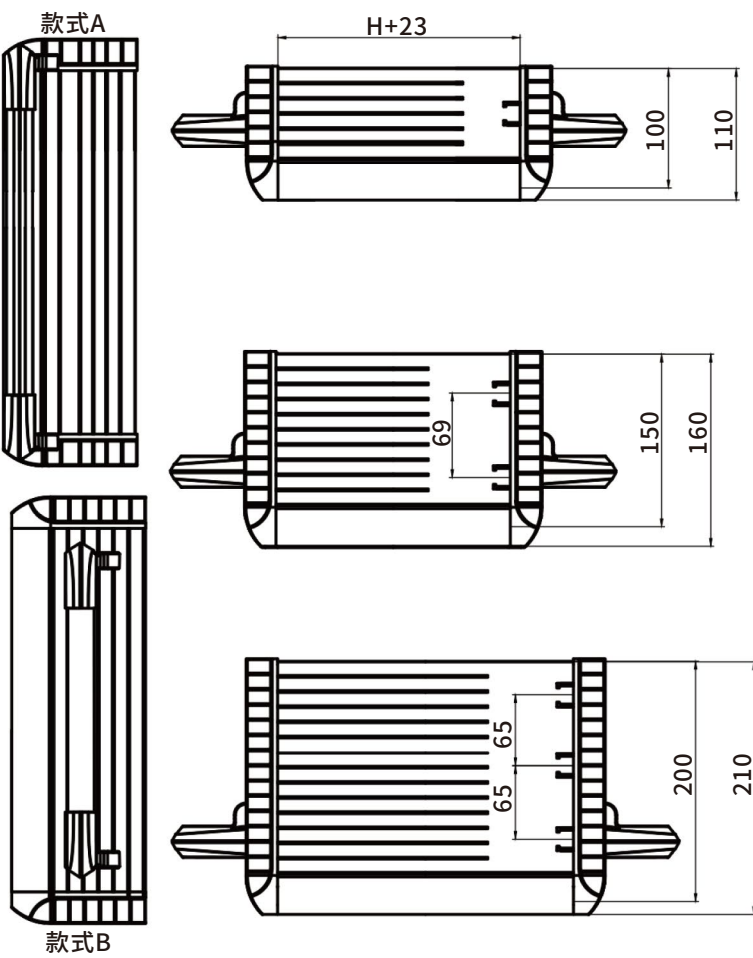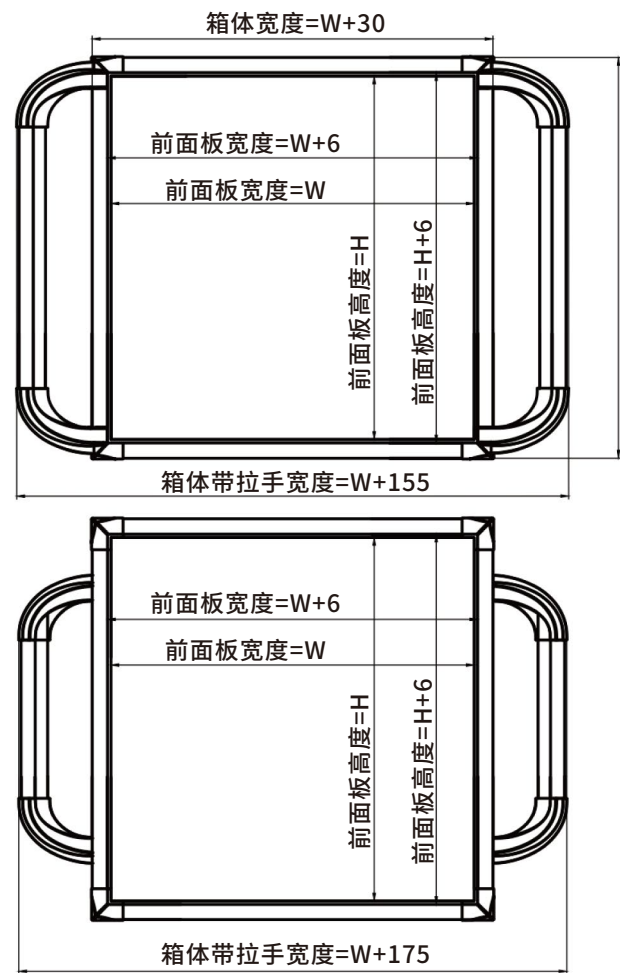

安装连接方式 Installation connection method

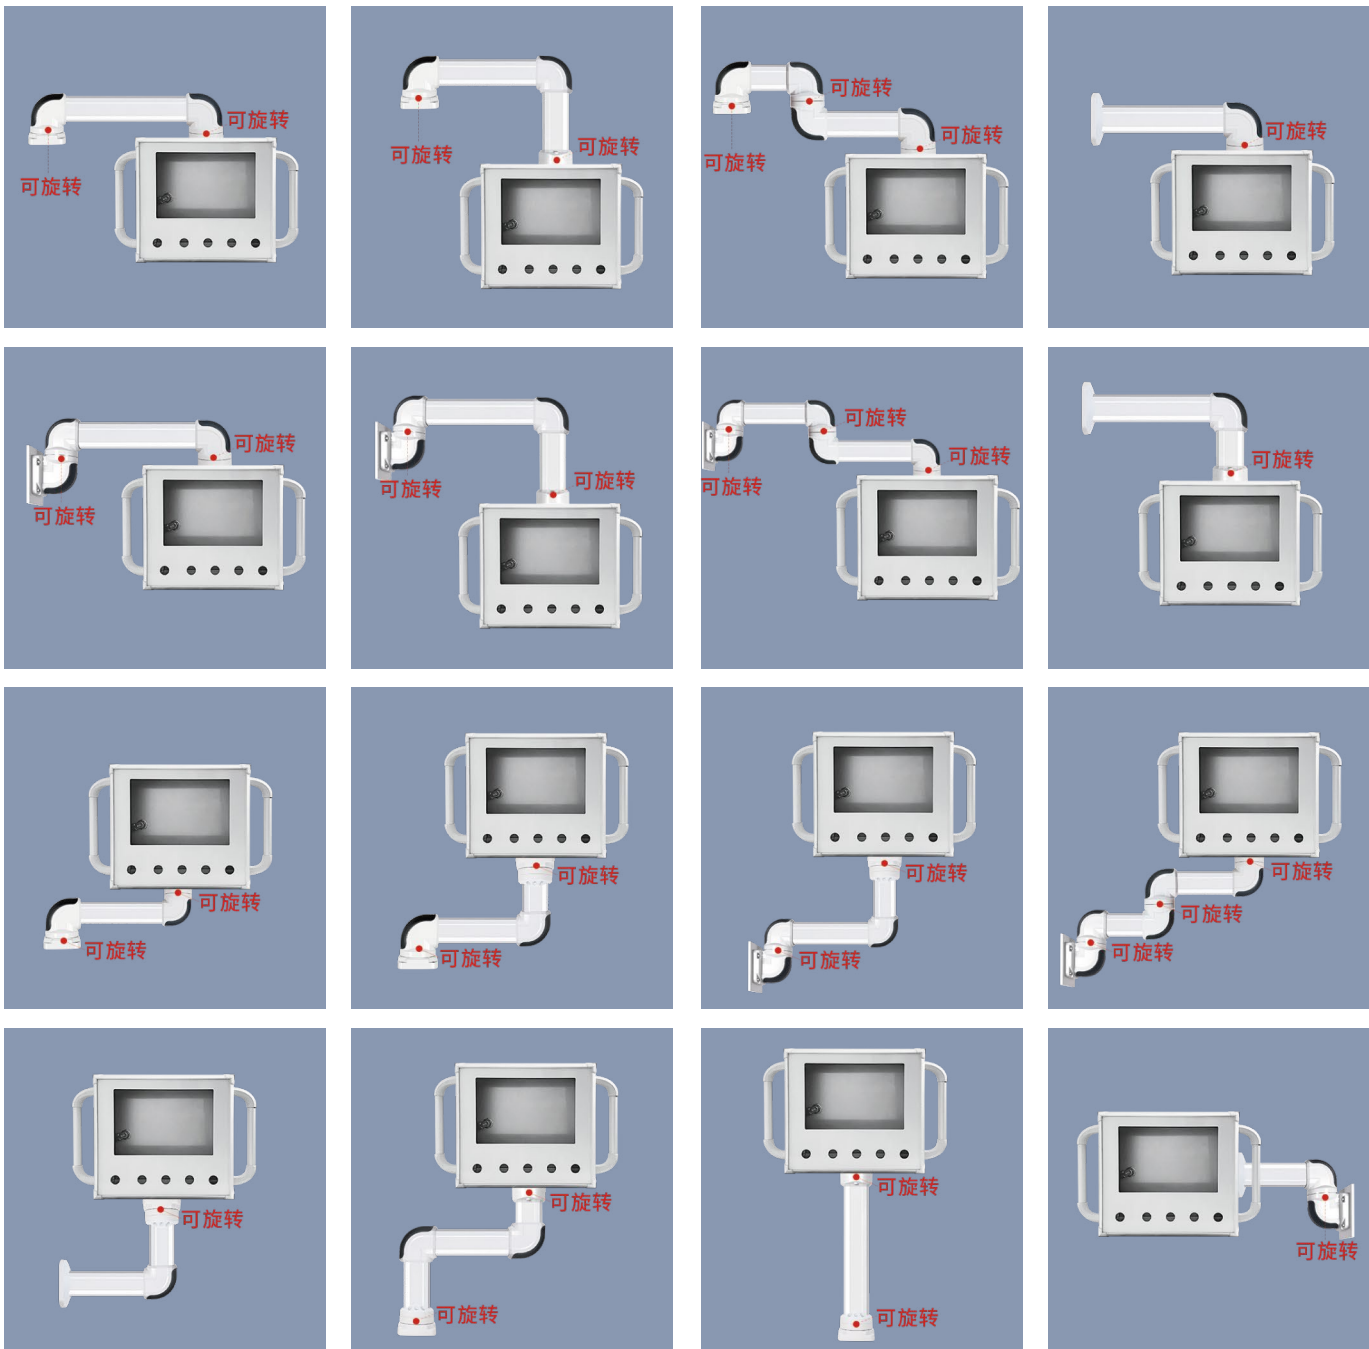

应用实例 Application example



控制箱系列-Control Box Series


CP-80-130-155-180-210-230-280-330-380-430系列控制箱
CP-80-130-155-180-210-230-280-330-380-430 Series Control Box




- 箱体防护等级: 后开门:IP54; 螺钉固定后面板:IP65
- 箱体材质: 铝型材和把手:铝合金6063
- 角部件: 压铸铝合金
- 箱体颜色: 铝型材和把手管: 阳极氧化铝本色
- 角部件:RAL9012色
- 把手固定件: 压铸铝合金RAL9012色
- Enclosure protection class: Rear door: IP54; Screw-fixed rear panel: IP65
- Enclosure material: Aluminum profiles and handles: Aluminum alloy 6063
- Corner components: Die-cast aluminum alloy
- Enclosure color: Aluminum profiles and handle tubes: Anodized aluminum natural color
- Corner components: RAL9012 color
- Handle fixing parts: Die-cast aluminum alloy RAL9012 color

面板可根据需求定制!
Panels are customized according to your requirements!

结构图 Structural diagram

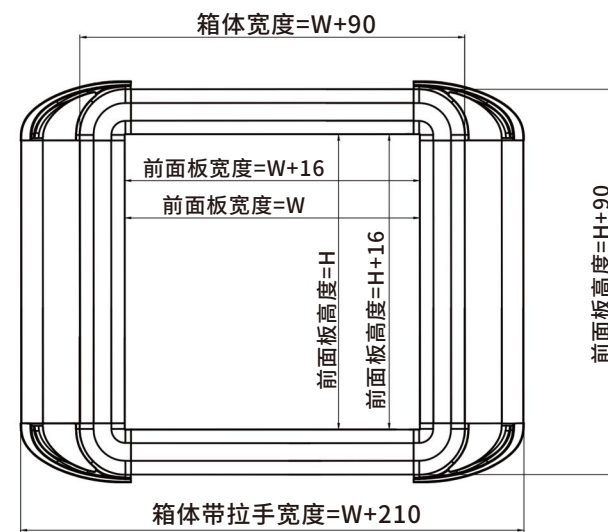


有效安装深度:80-130-155-180-210-230-280-330-380-430 mm
Effective installation depth: 80-130-155-180-210-230-280-330-380-430mm

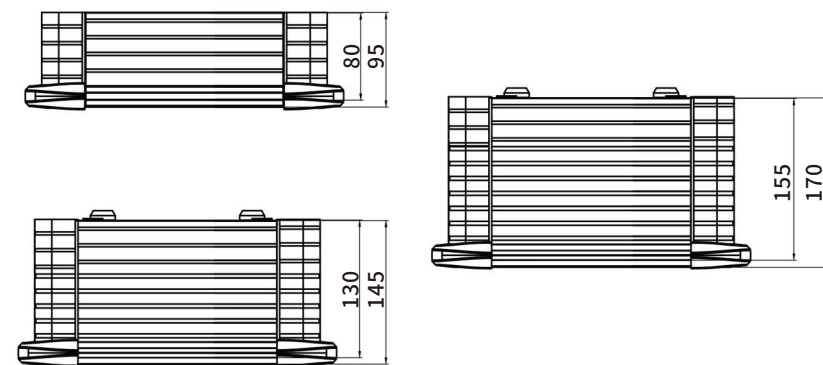

可定制控制箱实例 Customizable control box examples



安装连接方式 Installation connection method

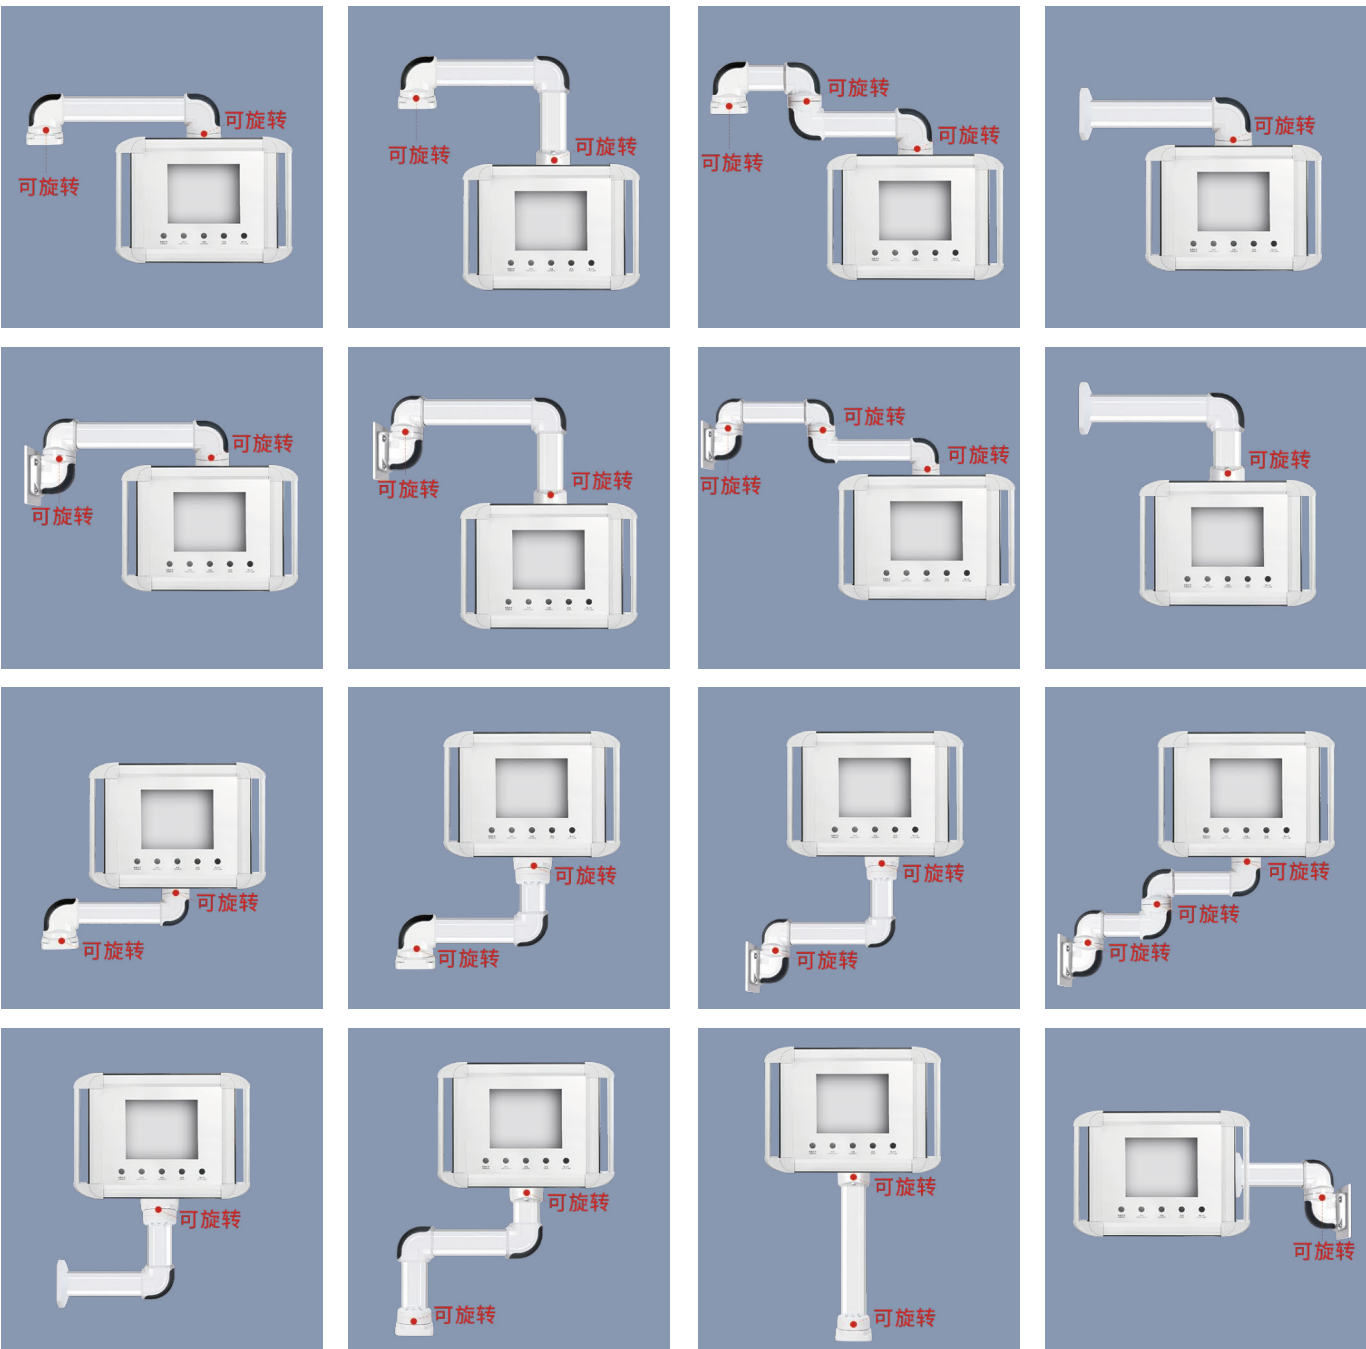

应用实例 Application example



• CP-140-210系列控制箱
CP-140-210 Series Control Box

CP210/CP140系列控制箱由高品质阳极氧化铝型材和铝压铸角部件拼接而成。简洁外观设计,结构稳固。表面阳极氧化的铝型材更易于擦拭,始终保持箱体光亮如新。

悬臂控制箱广泛应用在数控机床,装配线及专用设备上各类人机界面和附件的安装,配合悬臂或支撑系统,完全能符合实际操作的要求。

#箱体尺寸均按用户需求定制


The Cp210/CP140 series control box is made by splicing high-quality anodized aluminum profiles and aluminum die-casting corner components. Simple exterior design with stable structure. Aluminum profiles with anodized surfaces are easier to wipe and always keep the box shiny as new.

Cantilever control box is widely used in the installation of various human-machine interfaces and accessories on CNC machine tools, Assembly line and special equipment. It can fully meet the requirements of actual operation with the cantilever or support system.

*Box dimensions are customized according to user needs





- 有效安装深度: CP210;CP140
 - 箱体防护等级: 后开门:IP54; 螺钉固定后面板:IP65
 - 箱体材质: 铝型材和把手:铝合金6063
 - 角部件: 压铸铝合金
 - 把手固定件: PA66
 - 颜色: 铝型材和把手管: 阳极氧化铝本色
 - 角部件: 岩石灰, 近似RAL7012
 - 后门(后面板): 3mm铝板
 - 表面氧化
 - 把手固定件: 银灰色
- Effective installation depth: CP210;CP140
 - Protection level: Rear door opening IP54, Screw fixed rear panel: IP65
 - Material: Aluminum profiles and handles: Aluminum alloy 6063
 - Corner component: Die cast aluminum alloy
 - Handle fixing part: PA66
 - Color: Aluminum profiles and handles: anodized aluminum natural color
 - Corner component: Rock gray, approximately RAL7012
 - Rear door (rear panel): 3mm aluminum plate
 - Surface oxidation
 - Handle fixing part: silver gray

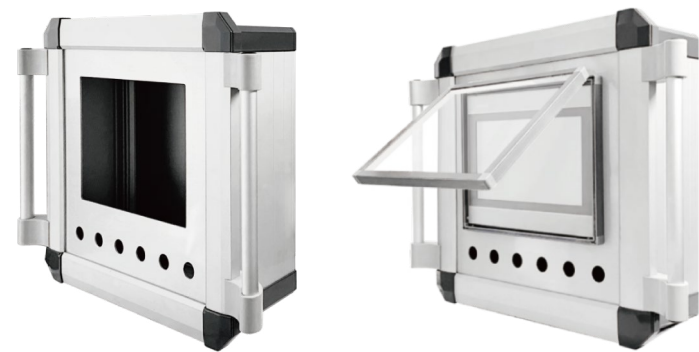


面板可根据需求定制!
Panels are customized according to your requirements!

• 结构细节图 Structural detail drawing

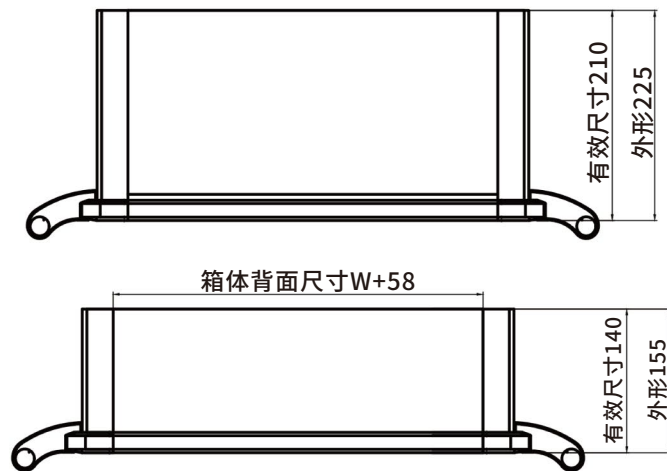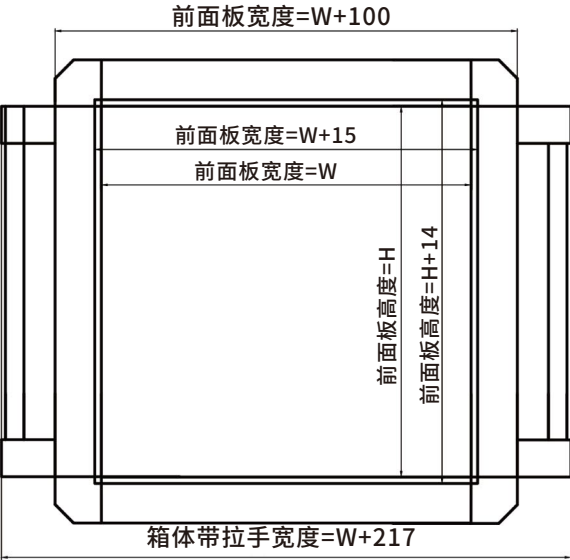

• 安装连接方式 Installation connection method

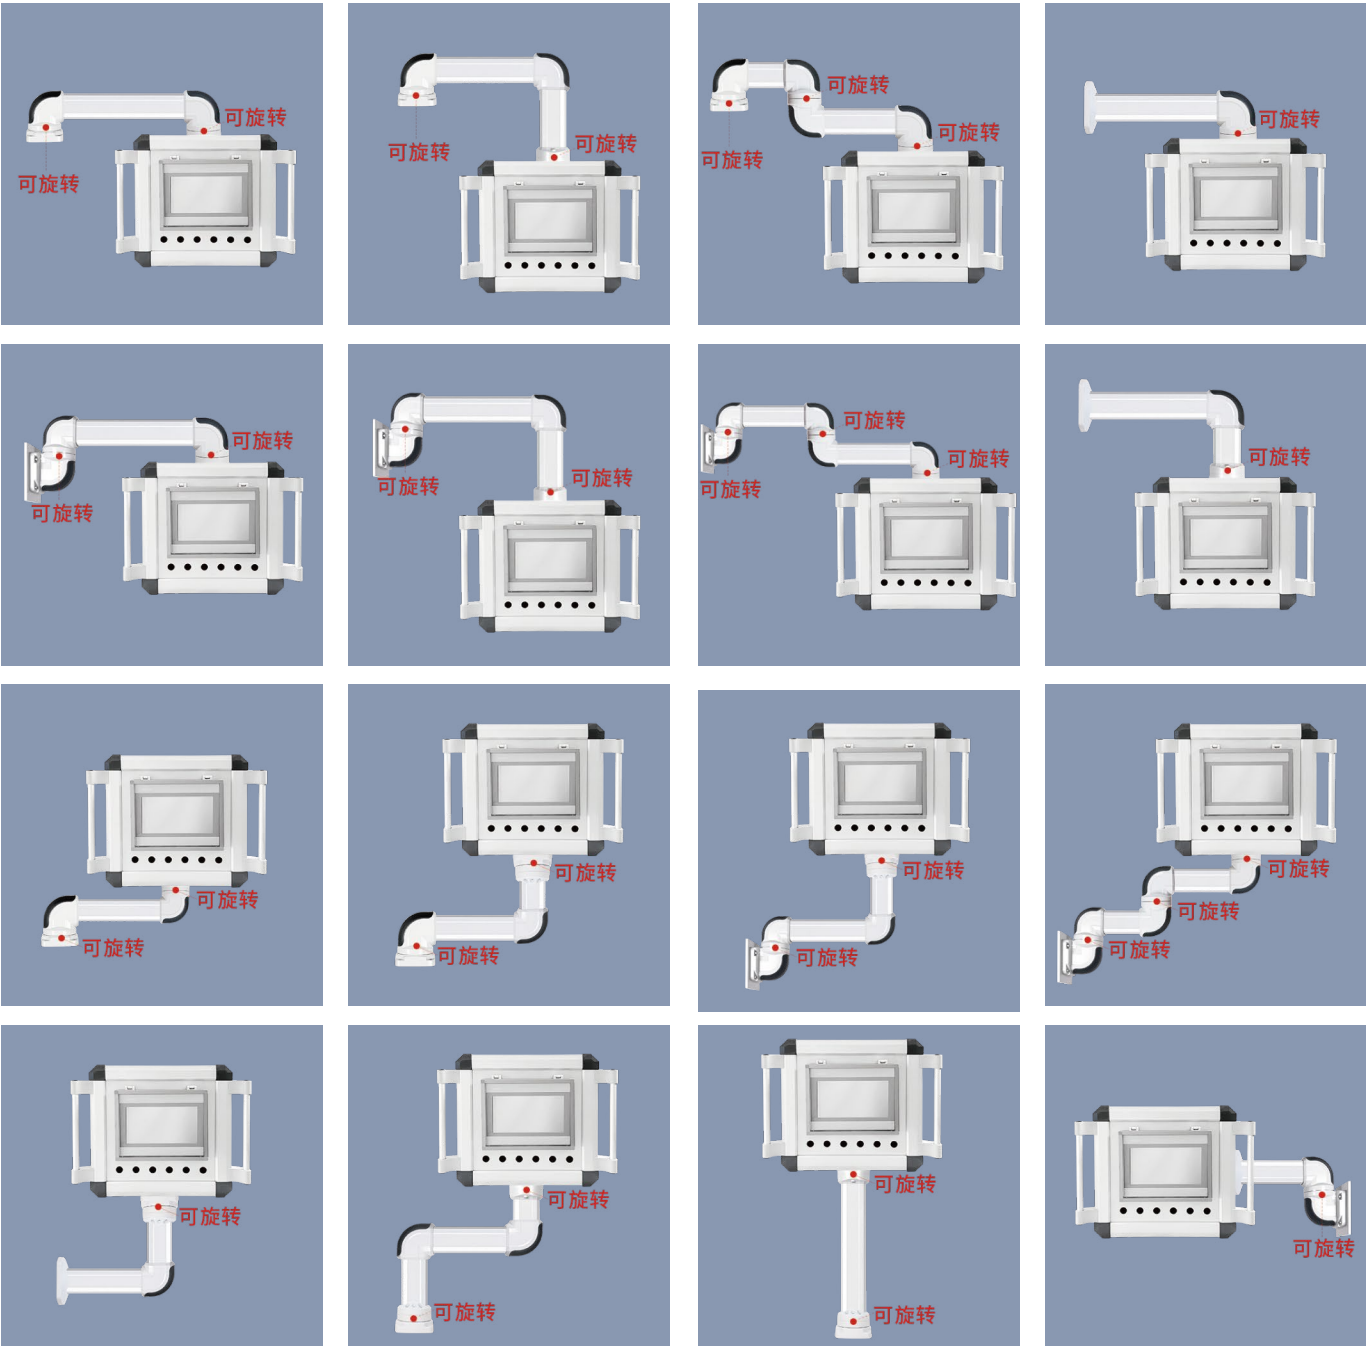

• 应用实例 Application example



控制箱系列-Control Box Series



140-210系列前开门控制箱 140-210 Series Front Door Opening Control Box



面板可根据需求定制!
Panels are customized according to your requirements!

- 有效安装深度: CP210;CP140
- 箱体防护等级: 后开门:IP54; 螺钉固定后面板:IP65
- 箱体材质: 铝型材和把手:铝合金6063
- 角部件: 压铸铝合金
- 把手固定件: PA66
- 颜色: 铝型材和把手管: 阳极氧化铝本色
- 角部件: 岩石灰, 近似RAL7012
- 后门(后面板): 3mm铝板
- 表面氧化
- Effective installation depth: CP210;CP140
- Protection level: Rear door opening IP54, Screw fixed rear panel: IP65
- Material: Aluminum profiles and handles: Aluminum alloy 6063
- Corner component: Die cast aluminum alloy
- Handle fixing part: PA66
- Color: Aluminum profiles and handles: anodized aluminum natural color
- Corner component: Rock gray, approximately RAL7012
- Rear door (rear panel): 3mm aluminum plate
- Surface oxidation

结构细节图 Structural detail drawing

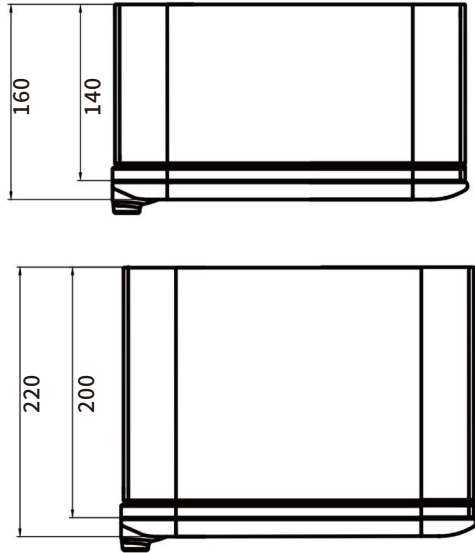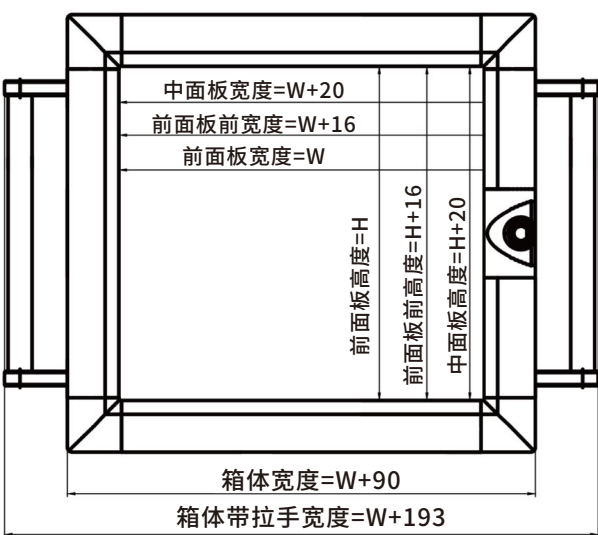

前后开门设计
Front and rear sliding door design




可增加透视窗
Can add a viewing window




可定制面板
Customizable panel

安装连接方式 Installation connection method

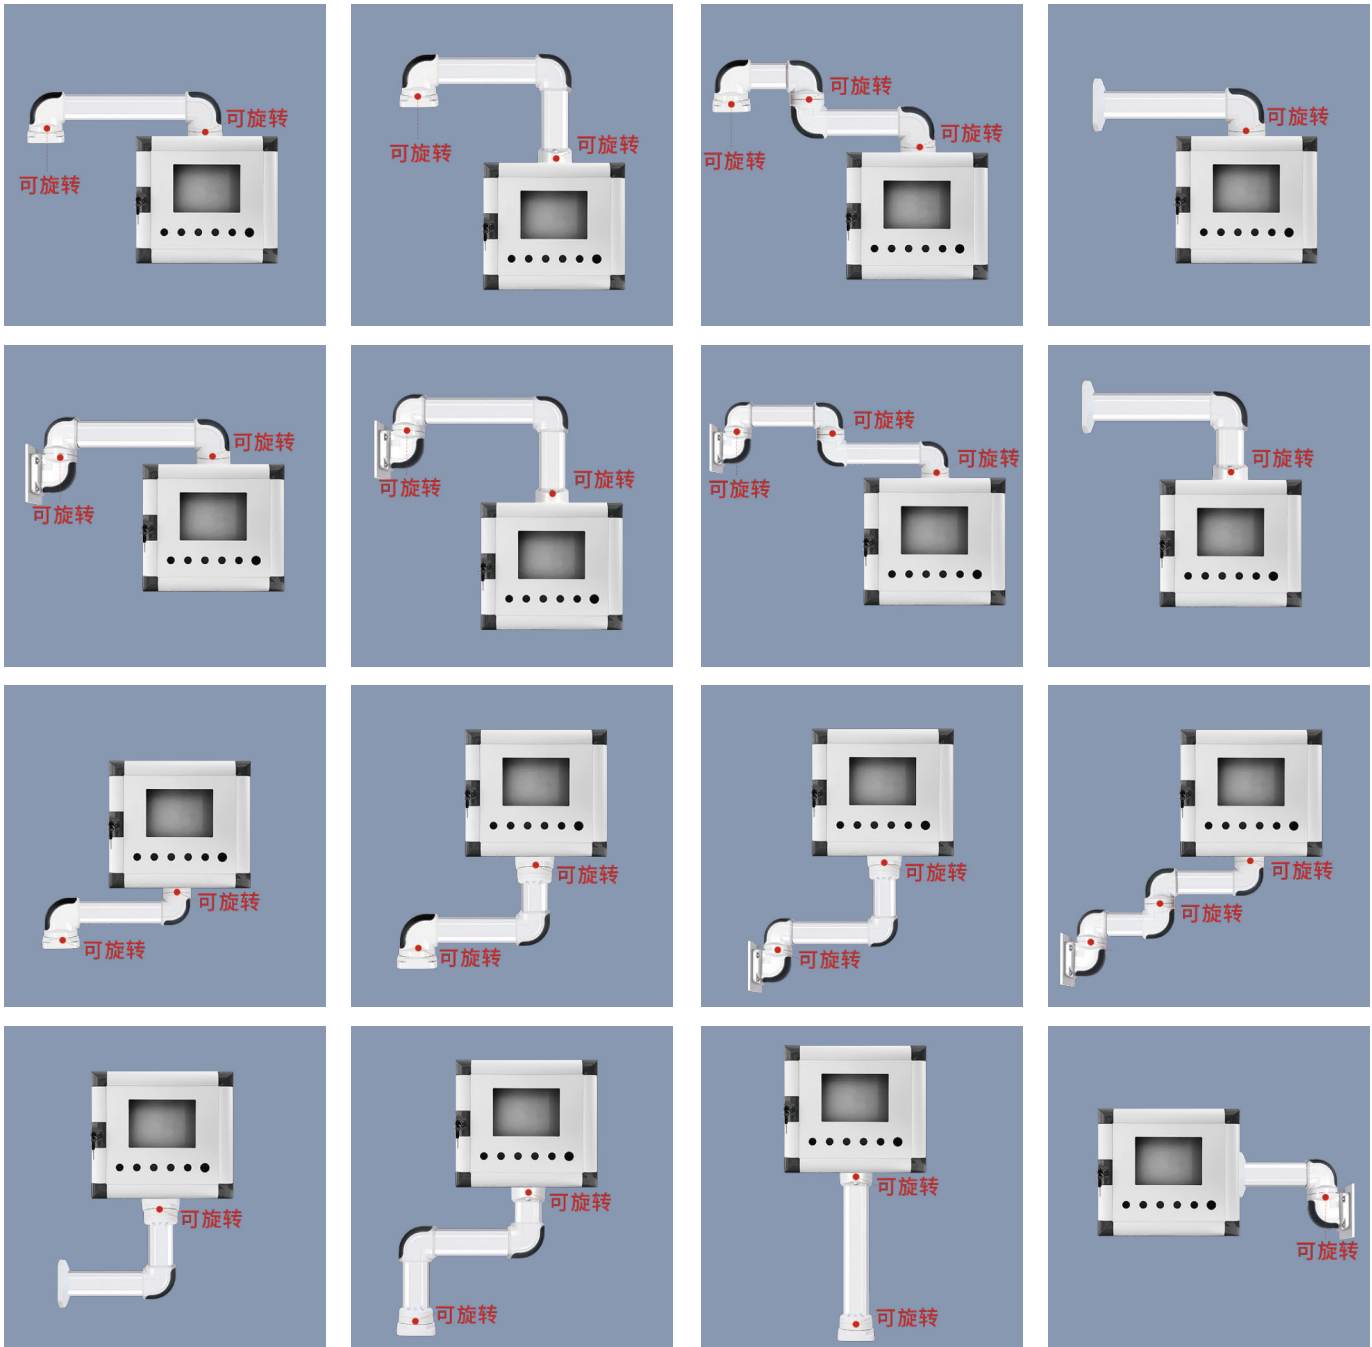

应用实例 Application example

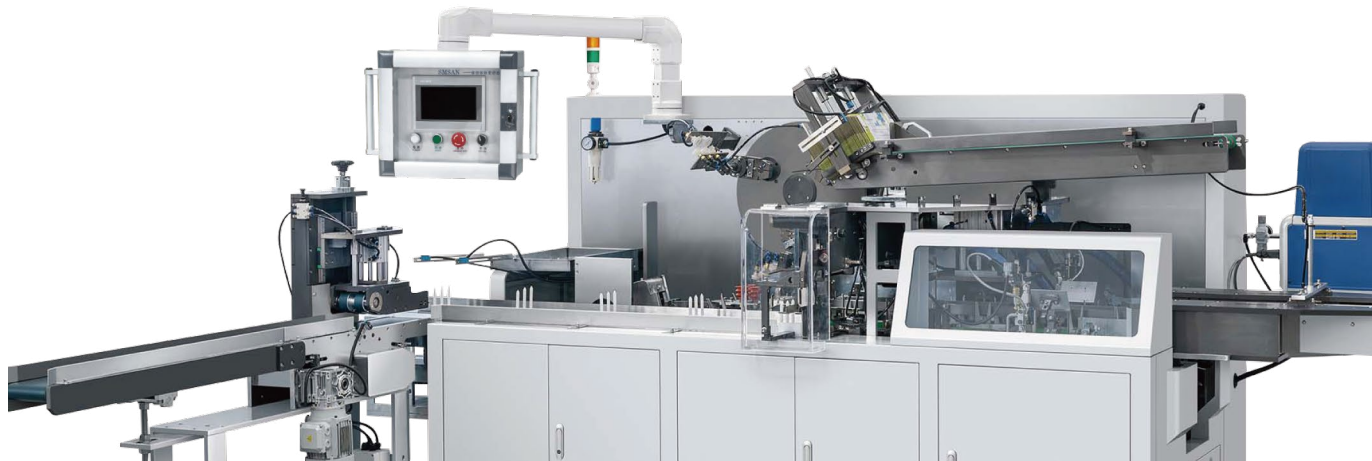


170-230系列前开门控制箱
170-230 Series Front Door Control Box




面板可根据需求定制!
Panels are customized according to your requirements!

- 有效安装深度: CP170;CP230
- 箱体防护等级: 后开门:IP54; 螺钉固定后面板:IP65
- 箱体材质: 铝型材和把手:铝合金6063
- 角部件: 压铸铝合金
- 把手固定件: PA66
- 颜色: 铝型材和把手管: 阳极氧化铝本色
- 角部件: 岩石灰, 近似RAL7012
- 后门(后面板): 3mm铝板
- 表面氧化
- Effective installation depth: CP170;CP230
- Protection level: Rear door opening IP54, Screw fixed rear panel: IP65
- Material: Aluminum profiles and handles: Aluminum alloy 6063
- Corner component: Die cast aluminum alloy
- Handle fixing part: PA66
- Color: Aluminum profiles and handles: anodized aluminum natural color
- Corner component: rock gray, approximately RAL7012
- Rear door (rear panel): 3mm aluminum plate
- Surface oxidation


结构细节图 Structural detail drawing

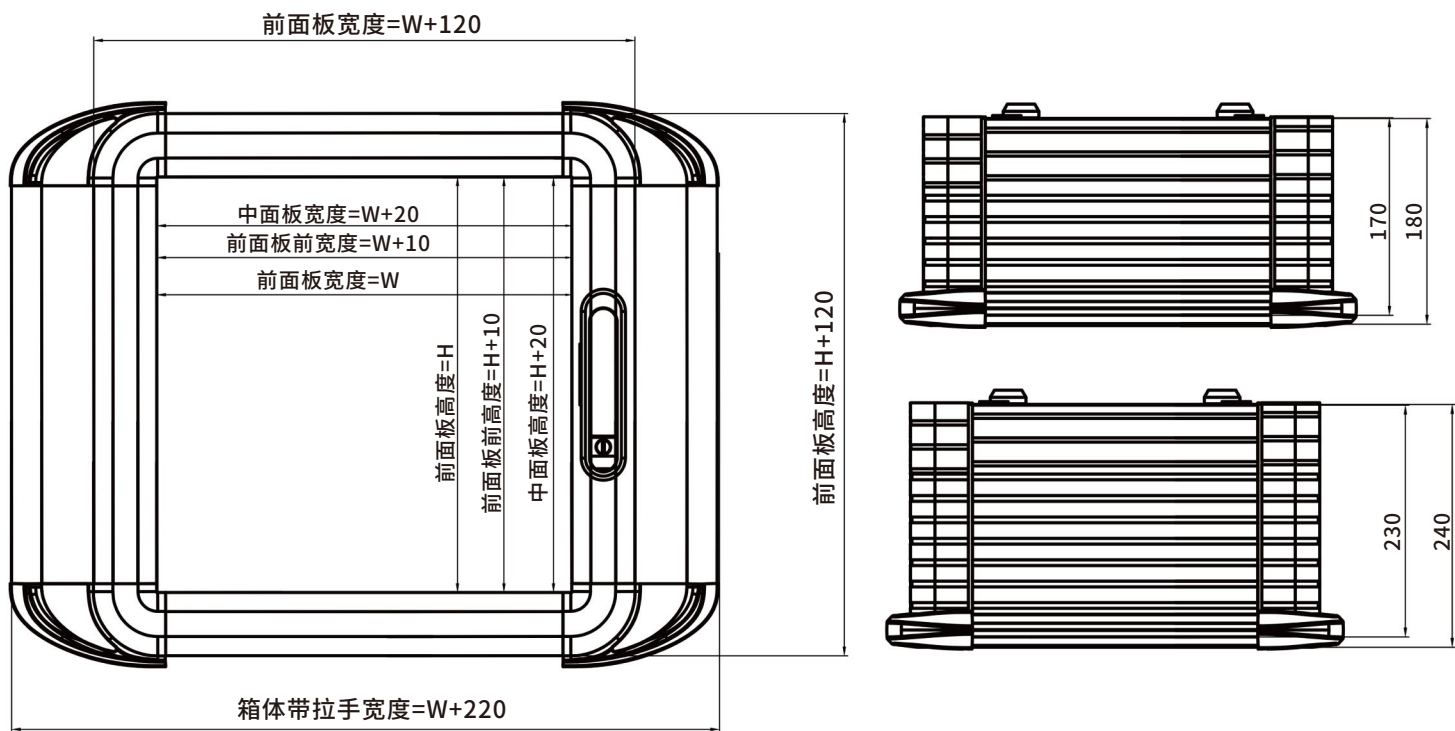

安装连接方式 Installation connection method

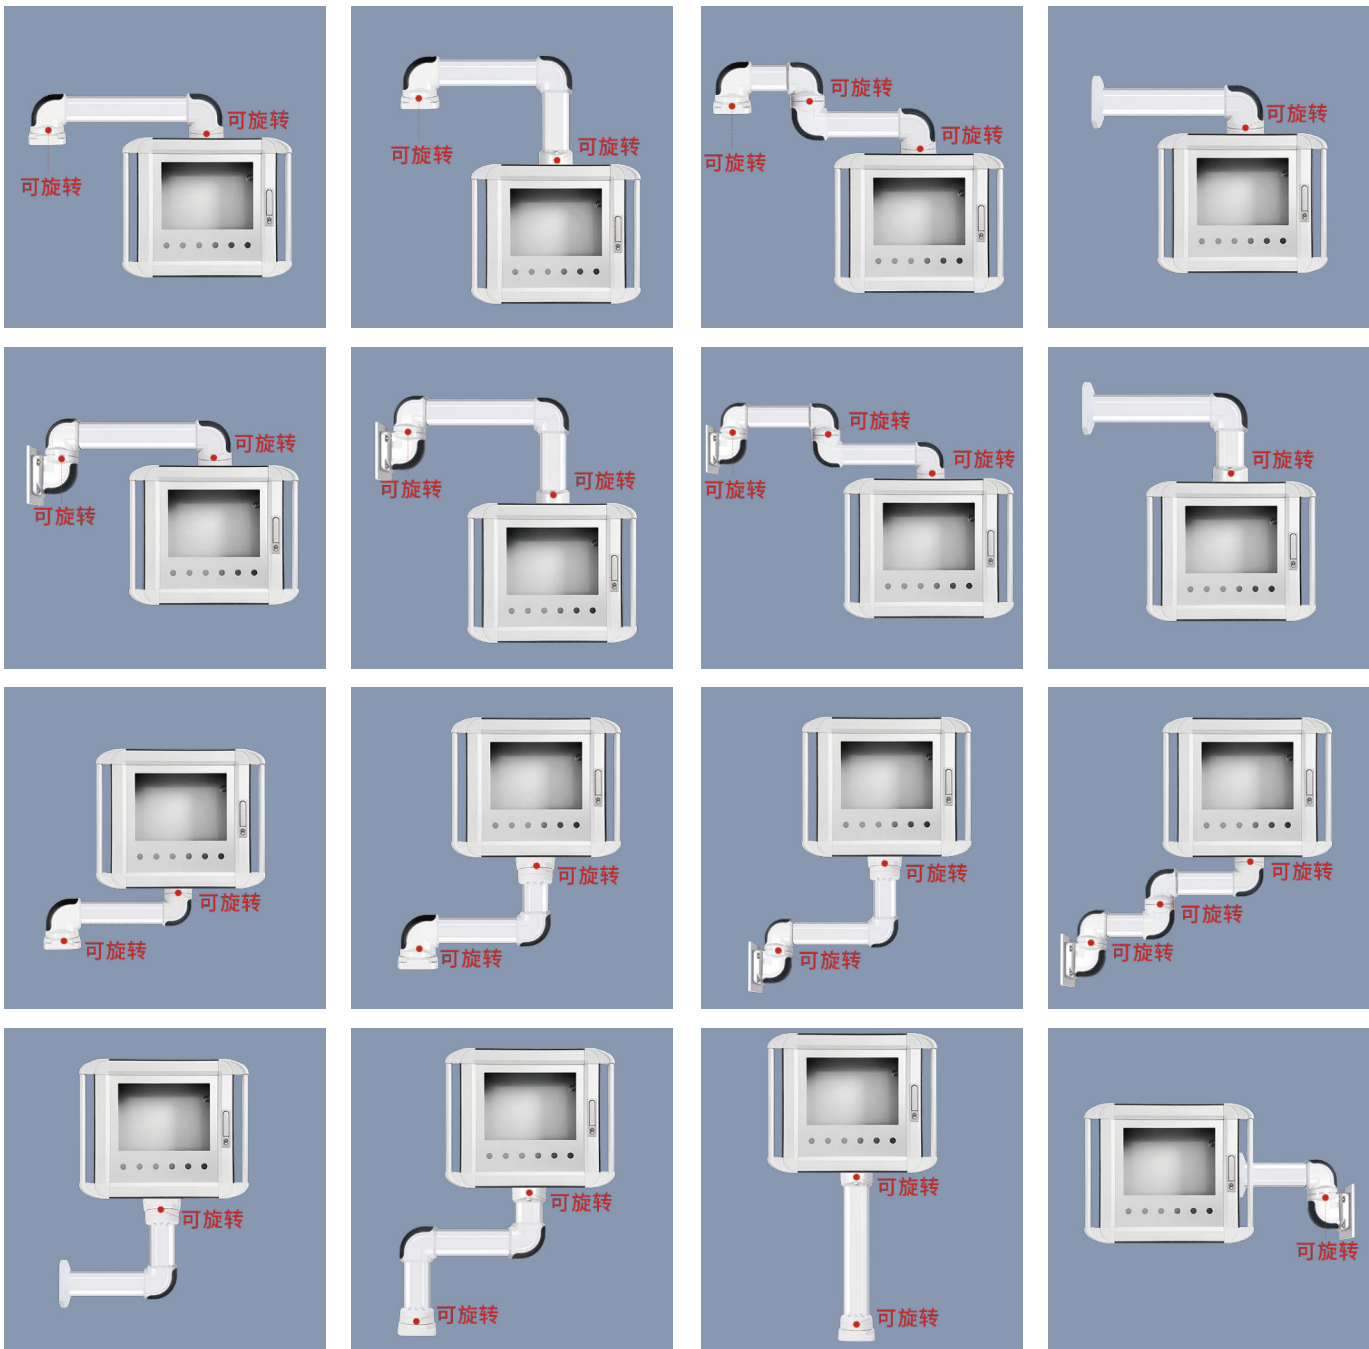

应用实例 Application example

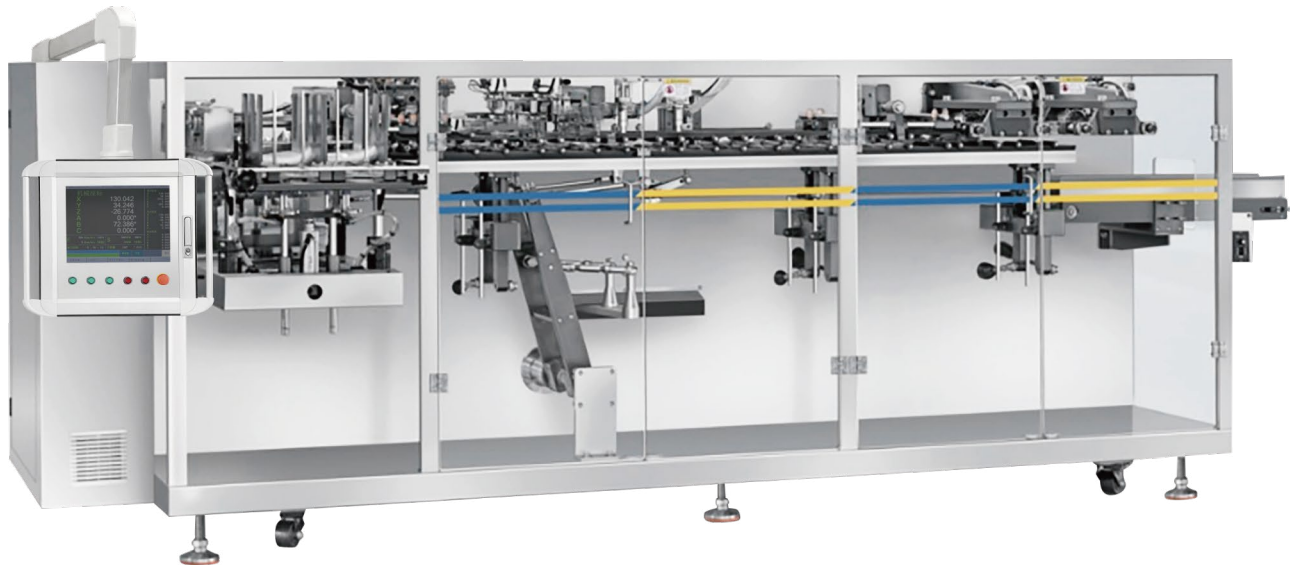

控制箱系列-Control Box Series

• 防爆系列控制箱 Explosion-proof Series Control Box



- 防腐等级:WF1
- 支路数:不限回路
- 产品材质:铸铝合金/钢板焊接/不锈钢
- 额定电压:220V/380V
- 额定电流:1~500A
- 电缆外径6~82mm
- 安装方式:挂式立式
- 入口规格:G1/2-G4(根据客户要求定制大小)
- 防护等级:IP45、IP54、IP65
- 进出线口:下进下出或下进上出(默认下进下出, 其他方向需注明)
- Corrosion protection grade: WF1
- Number of branches: Unlimited circuits
- Product material: Cast aluminum alloy / Steel plate welding / Stainless steel
- Rated voltage: 220V / 380V
- Rated current: 1 - 500A
- Cable outer diameter: 6 - 82mm
- Installation method: Wall-mounted or vertical
- Entry specification: G1/2 - G4 (custom size according to customer requirements)
- Protection grade: IP45, IP54, IP65
- Entry and exit ports: Bottom entry and bottom exit or bottom entry and top exit (default bottom entry and bottom exit, other directions need to be specified)

面板可根据需求定制!
Panels are customized according to your requirements!

该控制箱搭配75-110防爆悬臂
This control box is equipped with a 75-110 explosion-proof boom

• 适用范围 scope of application

- 01.适用与1区、2区危险场所
- 02.适用于IA IB IC类爆炸性气体环境
- 03.适用于T1-T6的环境
- 04.适用于可燃性分成环境20/21/22区

- 01. Applicable to hazardous areas in Zone 1 and Zone 2
- 02. Applicable to explosive gas environments of classes IA, IB, IC
- 03. Applicable to environments of T1-T6
- 04. Applicable to flammable gas areas of divisions 20/21/22



防水密封橡胶条
Waterproof sealing rubber strip



精细锁具
Fine locks




可定制面板
Customizable panel

• 安装连接方式 Installation connection method



• 应用实例 Application example

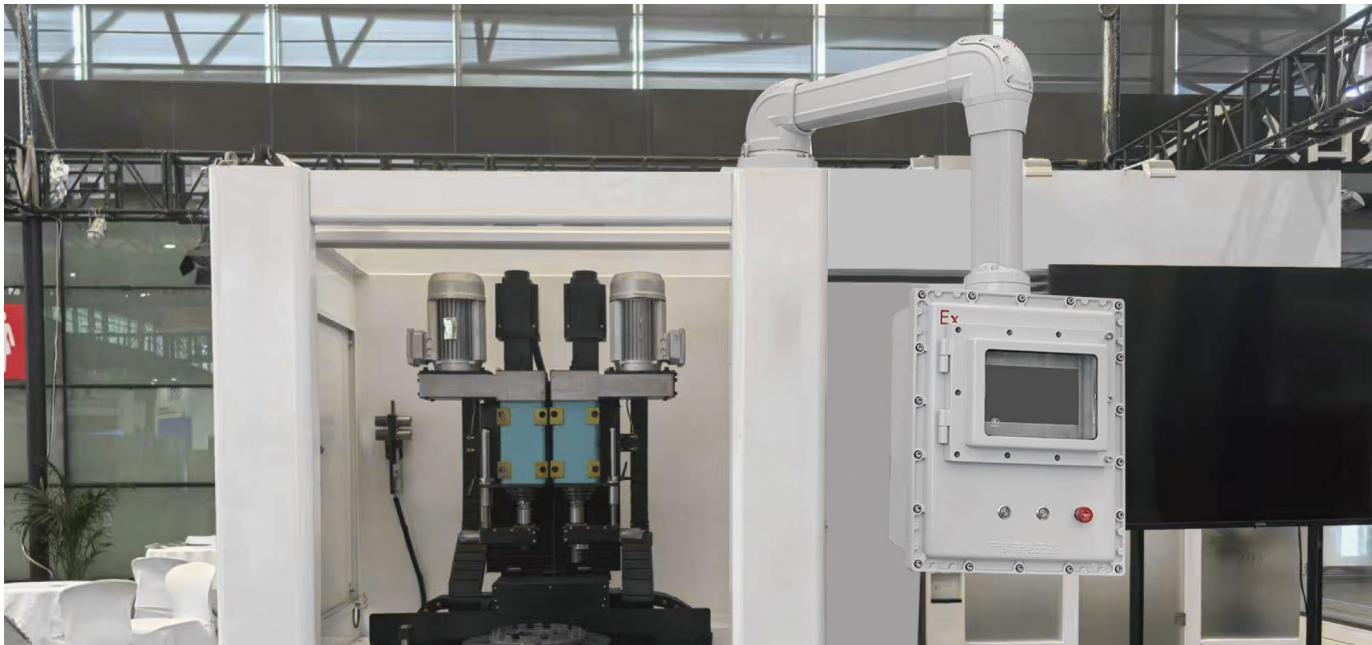

• 不锈钢系列控制箱
Stainless steel Series Control Box




面板可根据需求定制!


Panels are customized according to your requirements!

- PU发泡密封条确保箱体达到IP56的防护等级
- 镀锌安装板也可在箱体外做布线用
- 箱口多层保护槽不但起加固作用而且能防止门板打开时脏物和水进入箱内
- 专用的带双齿锁芯SUS304材质的不锈钢锁系统彰显档次, 确保通用性
- 不锈钢配电箱表面拉丝处理(高档箱体内部可做喷砂处理), 带折边的安装板和安装板支架限度的确保安装强度
- 防护等级:IP56(按GB4208-1993)
- 表面处理:拉丝, 安装板则为镀锌
- 标准配置:门板, 接地套, 门锁, 箱体, 密封条
- 标准配置:钢板厚度: 箱体:1.5mm 箱门:2.0mm
- PU foam sealing strips ensure the cabinet reaches an IP56 protection level.
- The galvanized mounting plate can also be used for wiring outside the cabinet.
- The multi-layer protective groove at the cabinet opening not only plays a reinforcing role but also prevents dirt and water from entering the cabinet when the door is opened.
- The special stainless steel lock system made of SUS304 material with a double-tooth lock core highlights the grade and ensures universality.
- The surface of the stainless steel distribution box is brushed (the interior of high-grade cabinets can be sandblasted), and the mounting plate with flanges and the mounting plate bracket ensure the installation strength to the maximum extent.
- Protection level: IP56 (according to GB4208-1993)
- Surface treatment: Brushing, and the mounting plate is galvanized.
- Standard configuration: Door panel, grounding sleeve, door lock, cabinet body, sealing strip.
- Standard configuration: Steel plate thickness: Cabinet body: 1.5mm; Door: 2.0mm.

• 结构图 Structural diagram

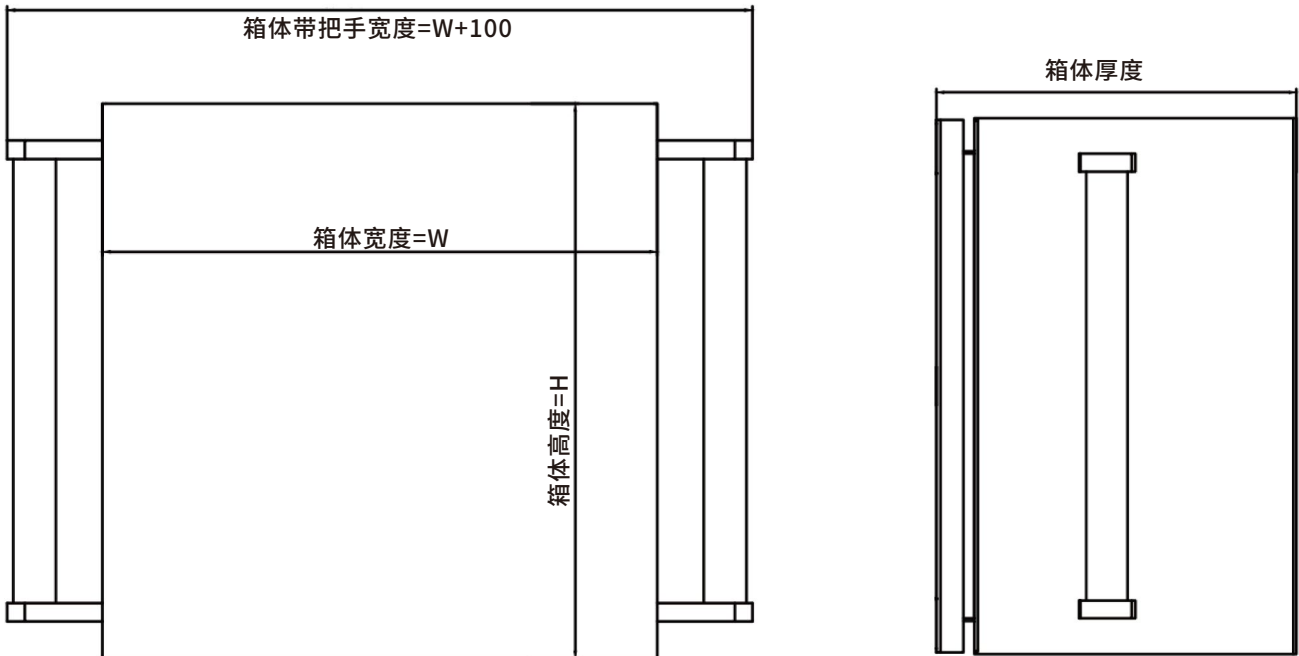

• 安装连接方式 Installation connection method

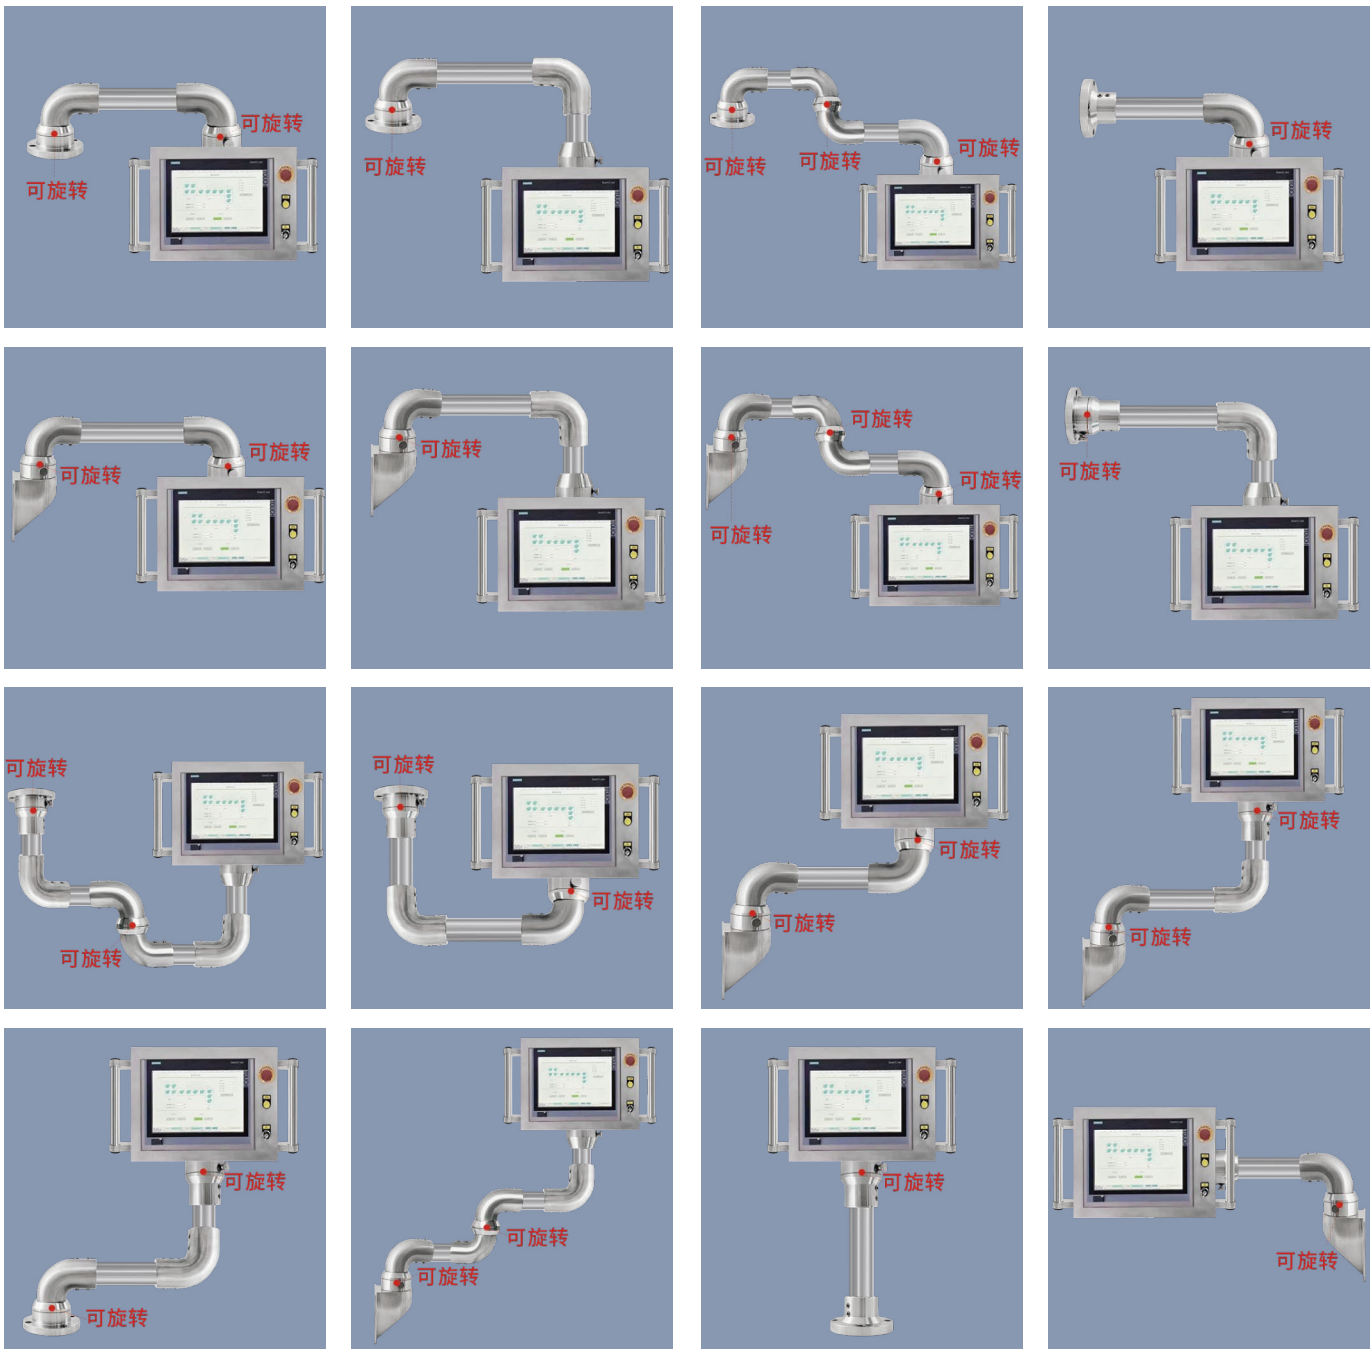

• 应用实例 Application example




可升降悬臂-Telescopic Cantilever

可升降悬臂, 配合60-95悬臂系统实现终端控制箱体可以在垂直方向上下一定范围内升降, 并且可以在该范围内悬停于任意高度位置, 极大提高了人员的操作舒适度, 同时便于避让横向移动范围内的障碍物, 增加了整个悬臂系统的应用灵活性。

The telescopic arm, in conjunction with the 60-95 telescopic system, enables the terminal control box to be lifted and lowered within a certain range in the vertical direction. It can also hover at any height within this range, significantly enhancing the operational comfort for personnel. At the same time, it facilitates the avoidance of obstacles within the lateral movement range, thereby increasing the application flexibility of the entire telescopic system.

一升一降舒适操作

One up, one down, smooth and comfortable operation

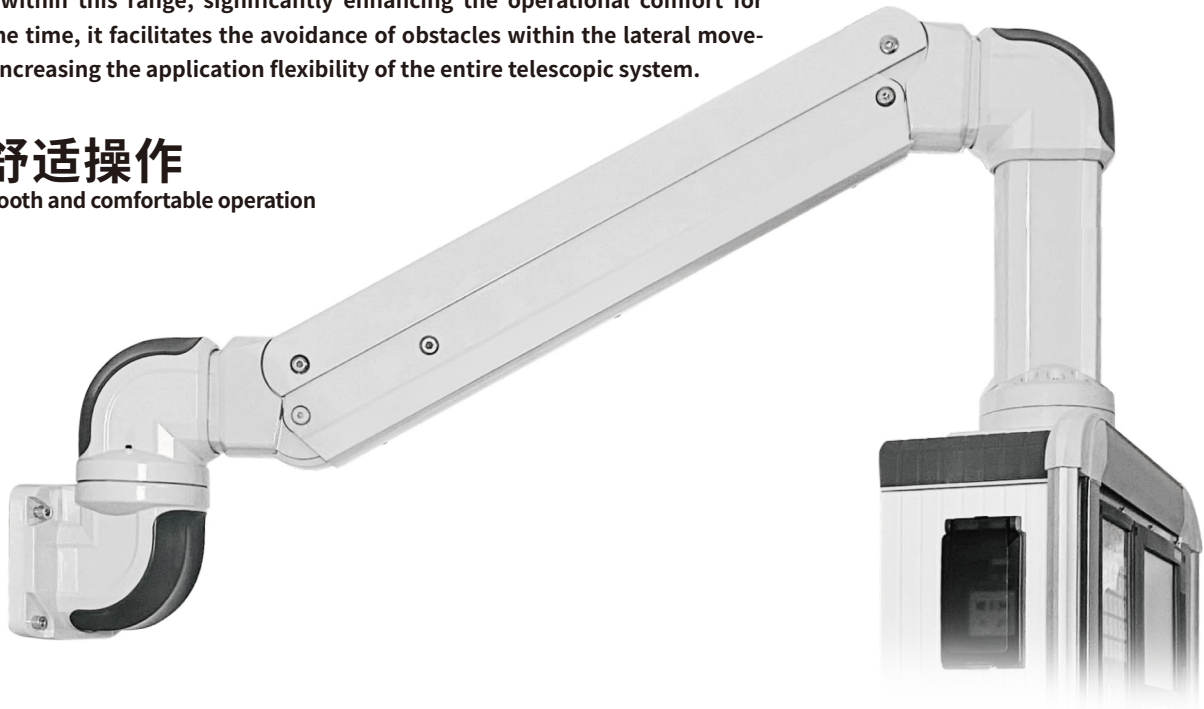

性能和特点 Performance and Features

- 升降臂长度:860mm
- 机械结构, 稳定可靠
- 易安装, 易调试
- 上下升降角度为±30度
- 与60-95悬臂组合
- 负载承重调节范围:10~28kg (10-15)/(15-28)
- 内藏式隐蔽走线不外露
- 整体颜色:RAL7035
- Lift arm length: 860mm
- Mechanical structure, stable and reliable
- Easy to install, easy to debug
- Up and down lifting angle: ±30 degrees
- Combined with 60-95 arm
- Load-bearing adjustment range: 10-28kg (10-15)/(15-28)
- Internal hidden wiring, no exposed parts
- Overall color: RAL7035



应用实例 Application example



升降臂终端负载重量:


适配悬臂系列	60-95系列
① 90度转角	0.6kg
② 连接管	3.2kg/m
③ 箱座	0.9kg
④ 控制箱体	实际重量
负载总重量	①+②+③+④

订货号及负载承重范围:

适配悬臂系列	60-95系列
订货号	SY-001
负载承重范围	10-15/15-28

- 箱体重量应包含安装在箱体内外所有配件的重量。
- 其他配置方案参照该手册中相应的悬臂街头重量。
- 安装、调节方法详见产品使用说明书。

可升降悬臂外形尺寸 Boundary Dimension

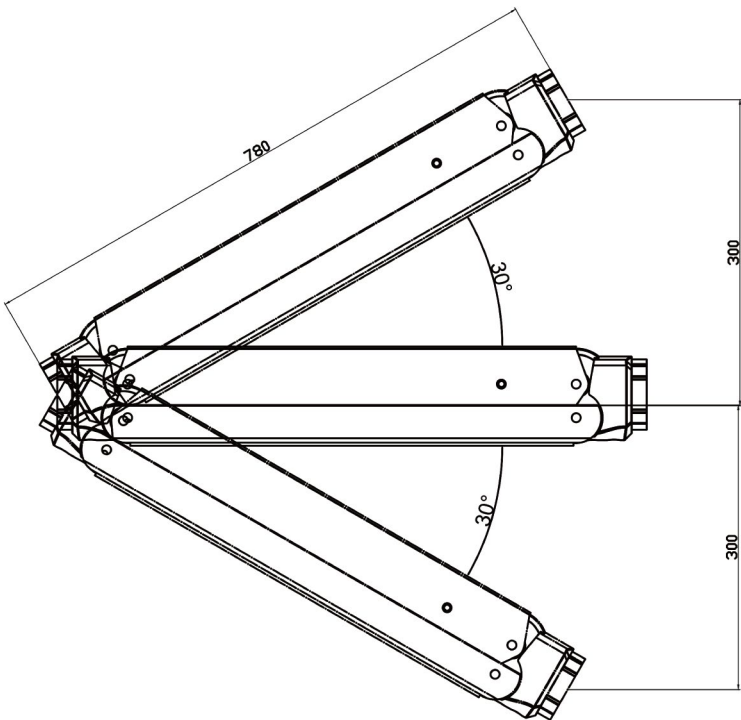

进线方式 Wiring method



键盘托架系列 -Keyboard Tray Series

性能特点 Performance and Features


- 型号:固定键盘:JP001、活动键盘:JP002
- 可自由组合搭配任意箱子
- 材质:键盘台面:铝型材,铝合金6063
- 两侧固定件:压铸铝合金
- 鼠标板:3mm铝板
- 颜色:键盘台面:阳极氧化铝本色
- 两侧固定件:岩石灰,近似RAL7012
- 鼠标板:岩石灰,近似RAL7012
- 订货号:JP-001
- Model: Fixed keyboard: JP001, Mobile keyboard: JP002
- Can be freely combined and matched with any box
- Material: Keyboard surface: Aluminum profile, Aluminum alloy 6063
- Both sides' fixing parts: Cast aluminum alloy
- Mouse pad: 3mm aluminum plate
- Color: Keyboard surface: Anodized aluminum original color
- Both sides' fixing parts: Rock gray, similar to RAL7012
- Mouse pad: Rock gray, similar to RAL7012
- Order number: JP-001



键盘托架细节 Details of the keyboard details



可推拉加厚托盘
Can pushed pulled Thickened tray

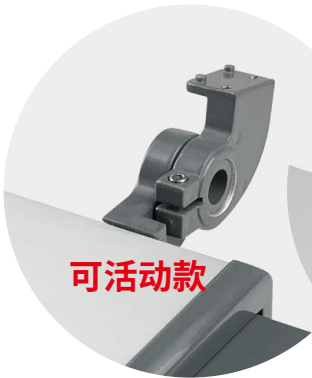

可活动款

连接处固定牢固
Connecting bracket is firmly attached.




固定款




厚实牢固面板
Thick and sturdy panel

可活动键盘托架 Adjustable keyboard tray

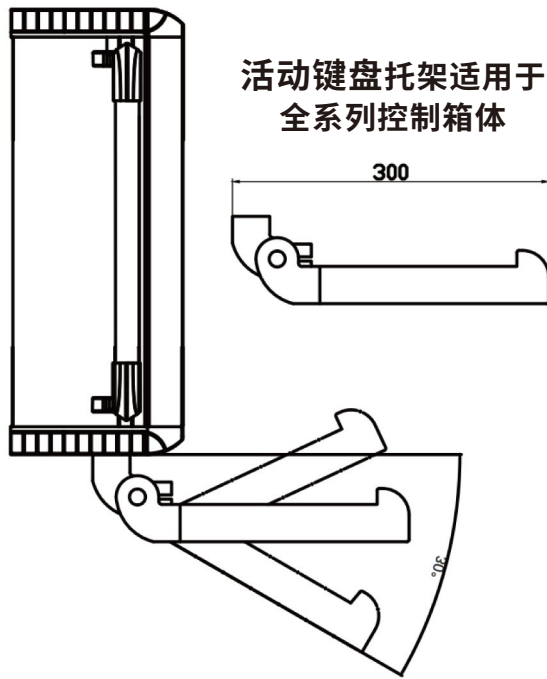


活动键盘托架适用于
全系列控制箱体

固定键盘托架 Fixed keyboard tray

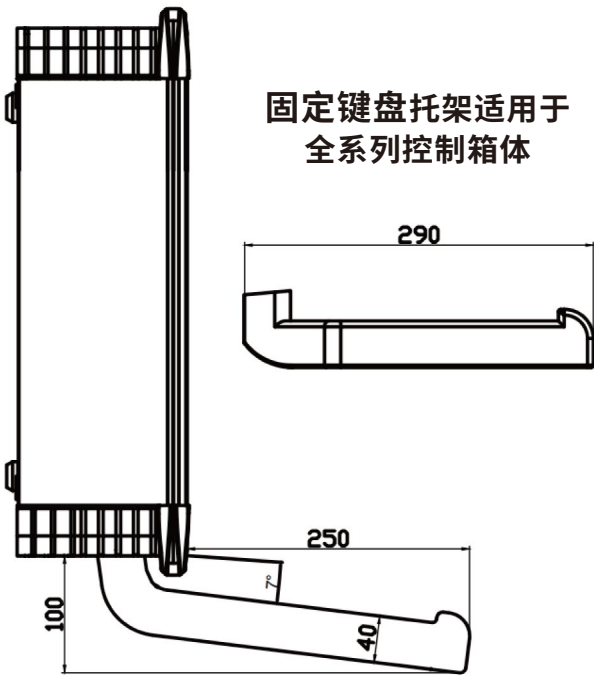

固定键盘托架适用于
全系列控制箱体

应用实例 Application example

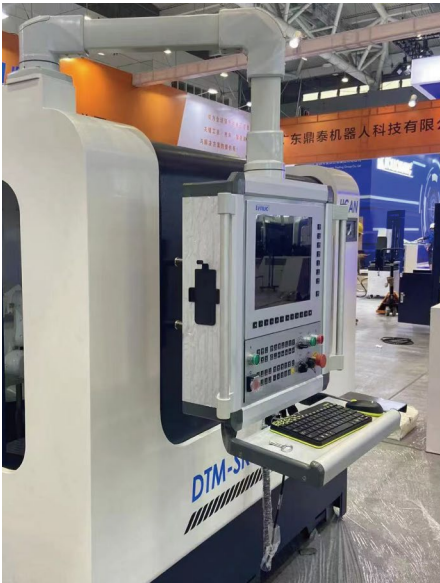

• 型号:ZCJ-1018

控制箱支架由高品质阳极氧化铝型材和铝压铸部件构成。外观设计简洁,结构轻盈稳固。立柱部分表面阳极氧化处理,与控制箱体浑然一体,前凸弧度设计形成的向后7度仰角更符合人体工程学原理。底盘部分采用表面深灰色喷塑工艺,符合工业场合需求。底盘脚轮或支撑底脚为选配件,可按需要另行订购。

The control box bracket is composed of high-quality anodized aluminum profiles and aluminum die-casting components. The exterior design is simple, and the structure is lightweight and stable. The surface of the column is anodized, seamlessly integrated with the control box, and the forward convex arc design forms a 7-degree elevation angle to the rear, which is more in line with ergonomic principles. The chassis adopts a deep gray spray molding process on the surface, which meets the needs of industrial occasions. Chassis casters or support feet are optional accessories and can be ordered separately as needed.



喷塑白色立柱
Spray white column

喷塑灰色立柱
spray gray column

订货号:
支架:ZCJ-1018-1(喷塑白色立柱)
支架:ZCJ-1018-2(喷塑灰色立柱)


Order number:
support: ZCj-1018-1 (sprayed white column)
support: 2Cj-1018-2 (sprayed gray Column)

• 产品信息 Product information

- 材质
- 键盘台面:铝型材,铝合金6063、两侧固定件:压铸铝合金102
 - 鼠标板:3mm铝板
- 颜色
- 键盘台面:阳极氧化铝本色两侧固定件:岩石灰, 近似RAL7012
 - 鼠标板:岩石灰,近似RAL7012
 - 订货号:JP-001

- Material
- Keyboard countertop:aluminum profile, aluminum alloy 6063
 - Fixed parts on both sides: die-cast aluminum alloy 102
 - Mouse board: 3mm aluminum board


- Color
- Keyboard countertop: anodized aluminum natural color
 - Fixed parts on both sides: rock ash, approximately RAL7012
 - Mouse board: Rock Grey, approximately RAL7012
 - Order number:JP-001

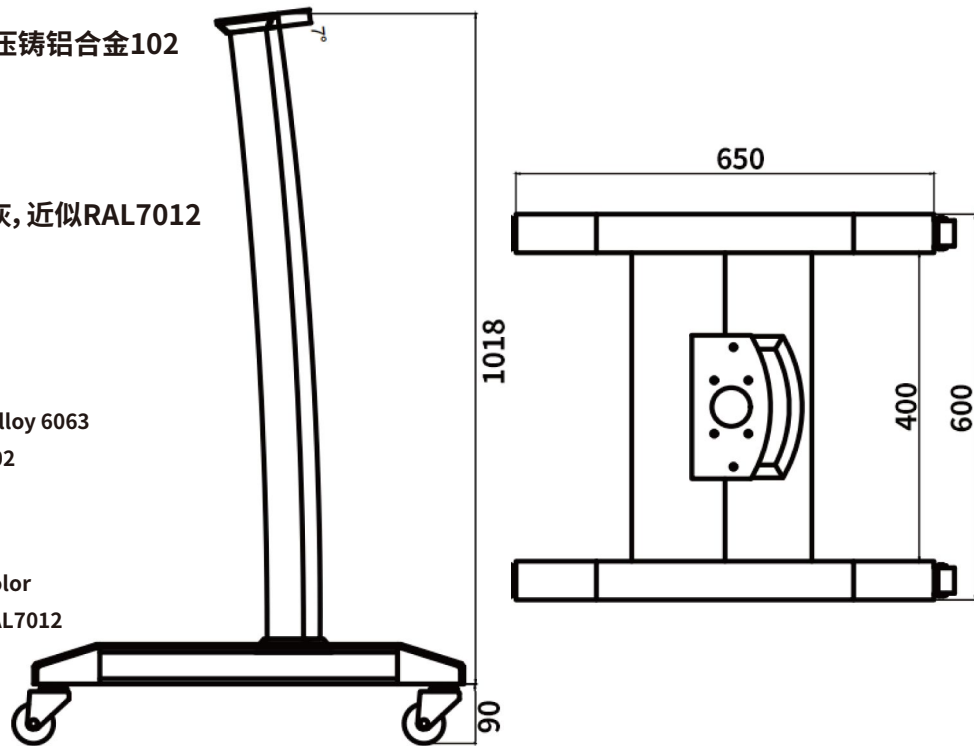


• 型号:ZJ-1019

ZJ-1019支架由铝合金与钣金组合而成;支架底部两个脚轮,便于移动;支架上可装配TV、CL、MV操作箱;箱体可前后调整角度,调整定位固定后,不能随意转动;电缆可从支架内部通过至底部;底部后有一个 $\phi 50$ 供出线的电缆接头或软管接头。

The ZJ-1019 bracket is made of aluminum alloy and sheet metal. It has two casters at the bottom for easy movement. The bracket can accommodate TV, CL, and MV operation boxes. The box can be adjusted in angle both forward and backward. Once the adjustment and positioning are fixed, it cannot be rotated randomly. The cables can pass through the bracket to the bottom. At the rear of the bottom, there is a $\phi 50$ cable connector or hose connector for cable output.

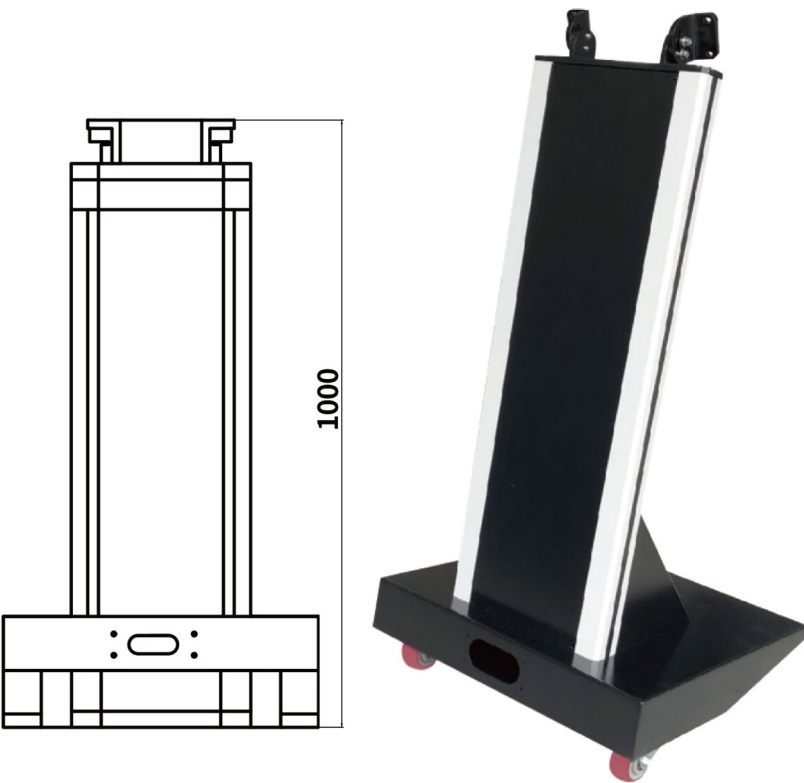

50-65轻型悬臂组件 50-65 Lightweight cantilever components

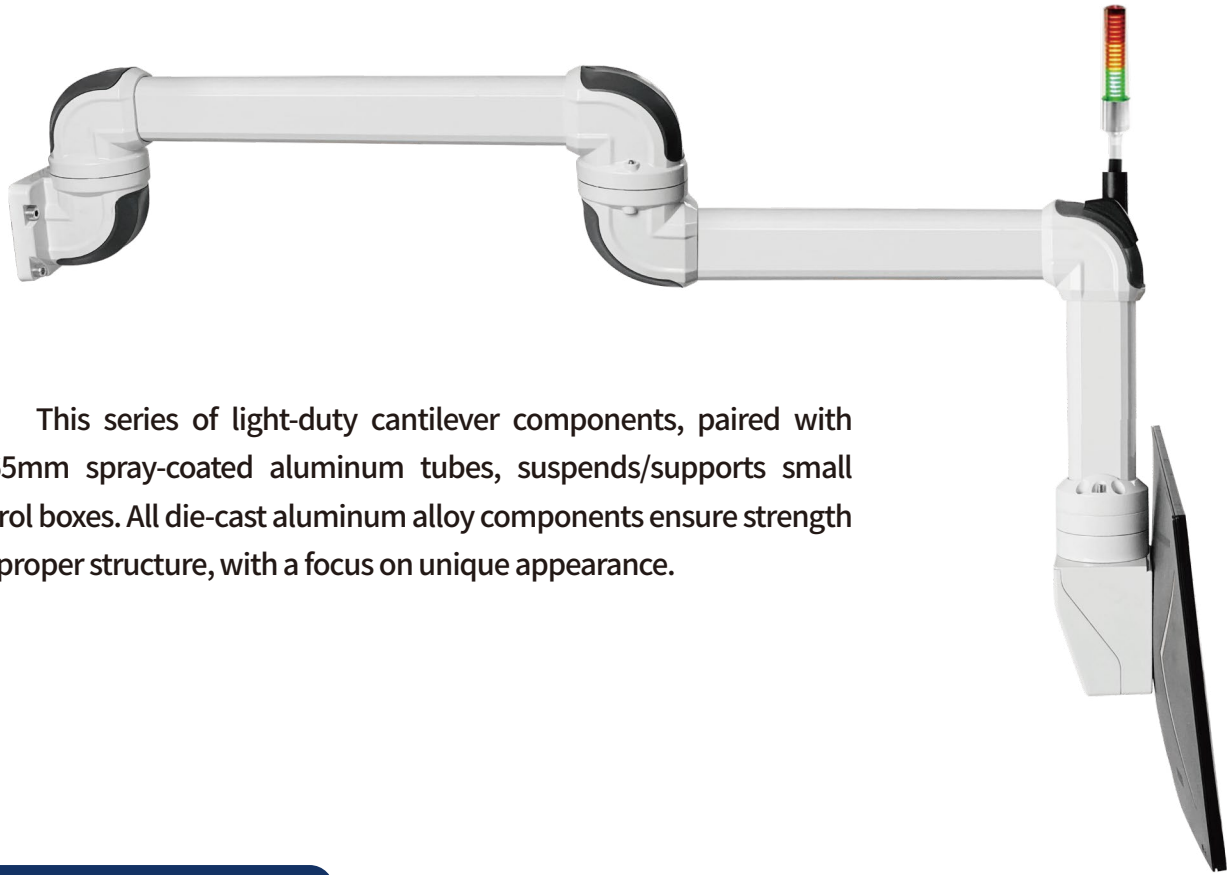


This series of light-duty cantilever components, paired with 50x65mm spray-coated aluminum tubes, suspends/supports small control boxes. All die-cast aluminum alloy components ensure strength and proper structure, with a focus on unique appearance.

箱体连接器 Enclosure Coupling




订货号	50.65.2090
Model	50.65.2090
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

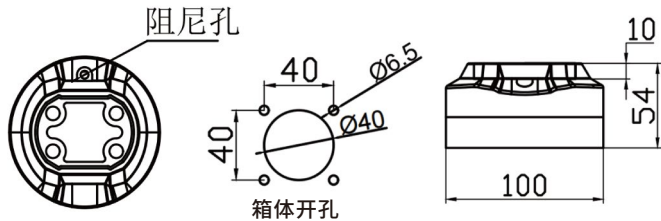

宽体箱体连接器 Enclosure Coupling




订货号	50.65.2081
Model	50.65.2081
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

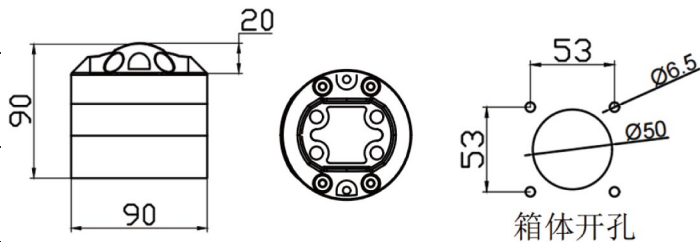

转角 Angle piece 90°




订货号	50.65.210
Model	50.65.210
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

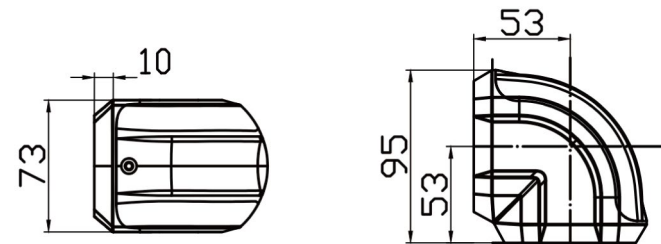

顶座 Top-mounted Joint




订货号	50.65.220
Model	50.65.220
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

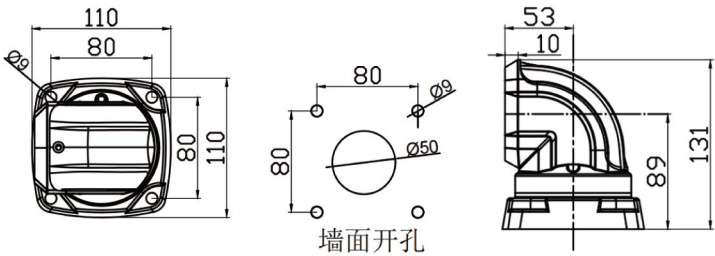

中间连接器 Intermediate hinge




订货号	50.65.230
Model	50.65.230
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

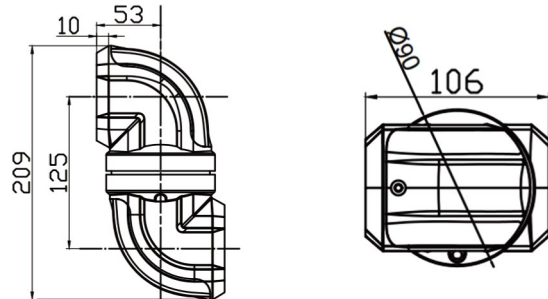

固定底座 Wall/base Mounting Bracket




订货号	50.65.240
Model	50.65.240
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	固定
Angle	Fixed angle

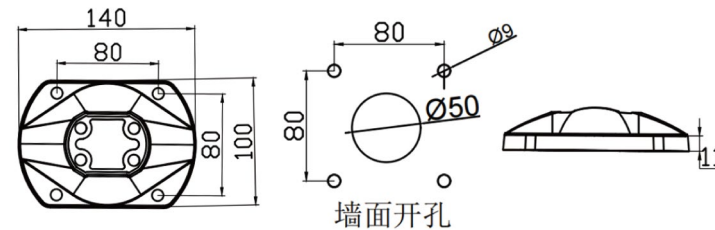

90°箱体连接器 Angel Piece 90°




订货号	50.65.250
Model	50.65.250
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

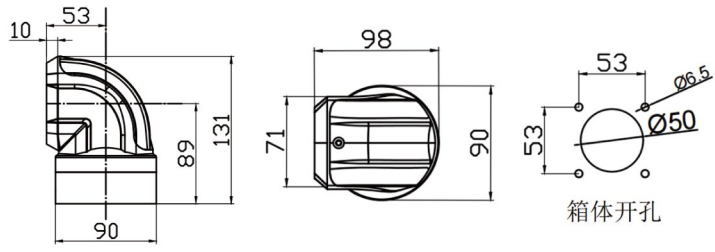

水平墙座 Wall-mounted Hinge



订货号	50.65.260
Model	50.65.260
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

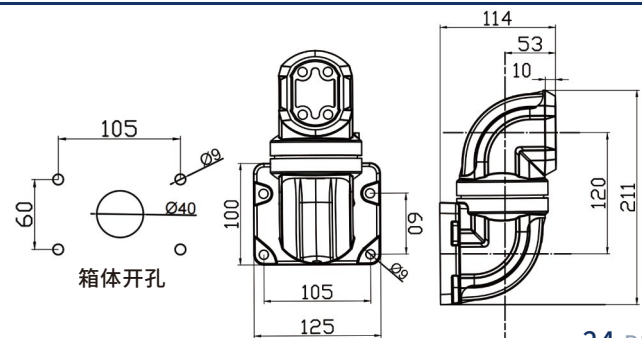


50-65 轻型悬臂组件 50-65 Lightweight cantilever components

垂直墙座 Wall-mounted Hinge




订货号	50.65.270
Model	50.65.270
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated 320°

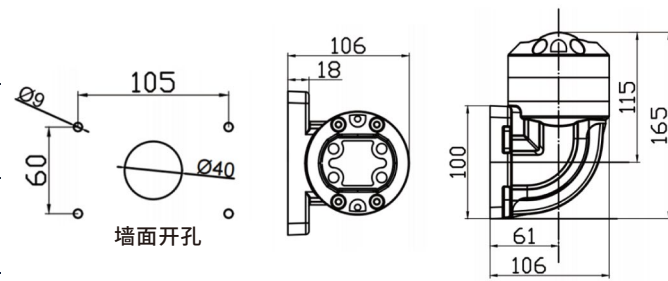

旋转底座 Top-mounted Joint




订货号	50.65.280
Model	50.65.280
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated 320°

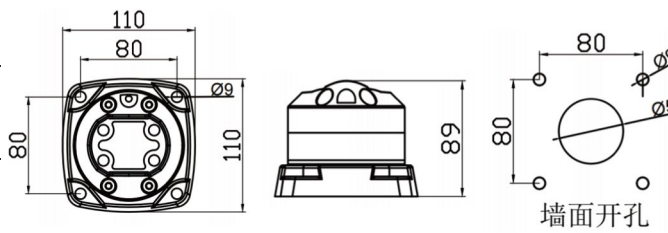

可旋转转角 Rotatable angle




订货号	50.65.290
Model	50.65.290
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated 320°

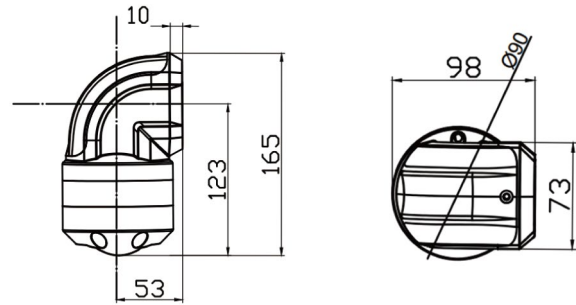

连接管 Support section




订货号	50.65.000
Model	50.65.000
材料	铝管
Material	Aluminum pipe

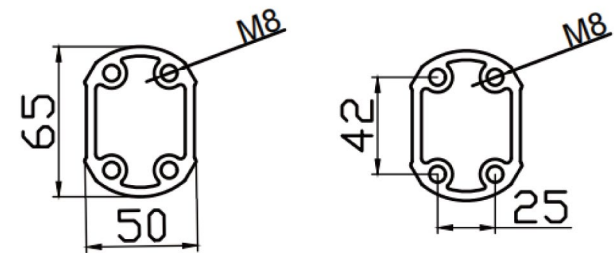

角度调节器 Angle demodulator




订货号	50.65.030
Model	50.65.030
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	±30°
Angle	Can Be Rotated 30°

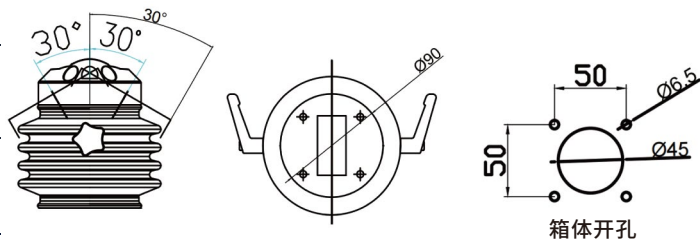

90°角度调节器 90°Angle demodulator




订货号	50.65.035
Model	50.65.035
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	±30°
Angle	Can Be Rotated 30°

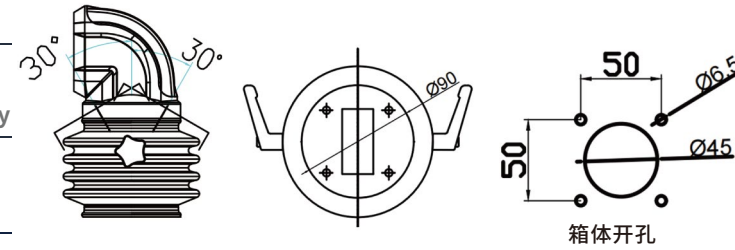

窄边箱体连接器 Enclosure Coupling




订货号	50.65.2091
Model	50.65.2091
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated 320°

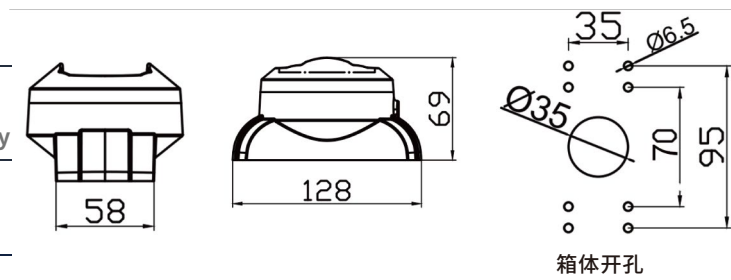

可旋转箱子底座 Rotatable box base




订货号	50.65.4900
Model	50.65.4900
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated 320°

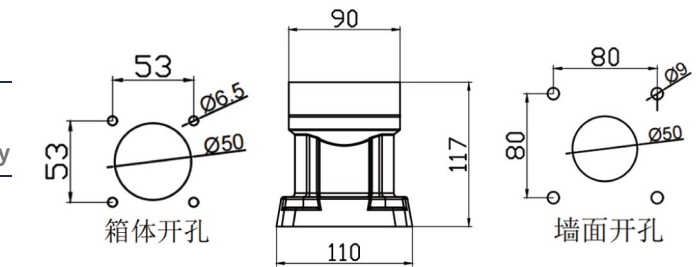

- **案例展示** Case presentation



60-95中型悬臂组件 60-95 Medium cantilever components

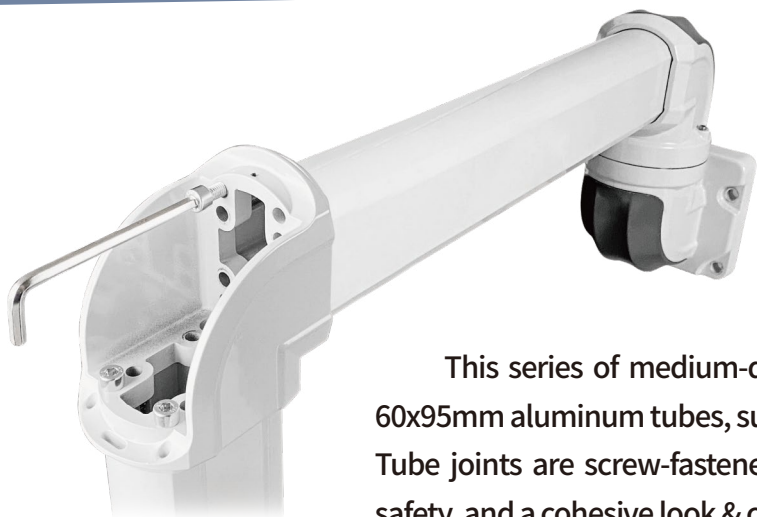


This series of medium-duty cantilever components, paired with 60x95mm aluminum tubes, suspends/supports medium control boxes. Tube joints are screw-fastened, featuring simple structure, reliability, safety, and a cohesive look & color range.

箱体连接器 Enclosure Coupling




订货号	60.95.3090
Model	60.95.3090
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

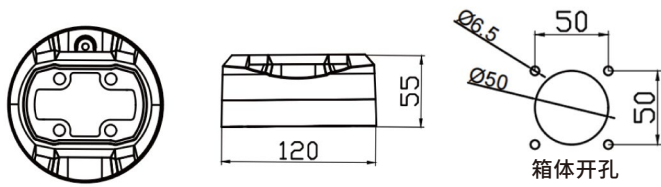

稳定箱体连接器 Enclosure Coupling




订货号	60.95.3081
Model	60.95.3081
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

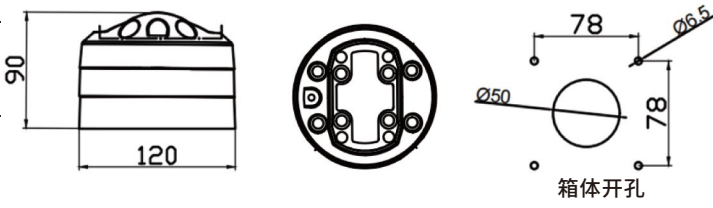

转角 Angle Piece 90°




订货号	60.95.310
Model	60.95.310
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

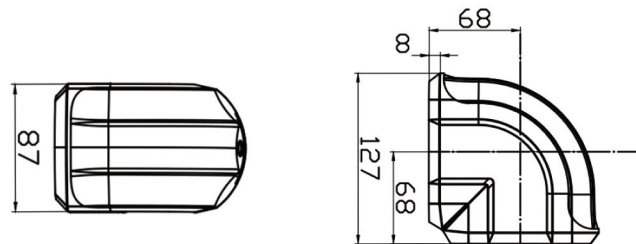

顶座 Top-mounted Joint




订货号	60.95.320
Model	60.95.320
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

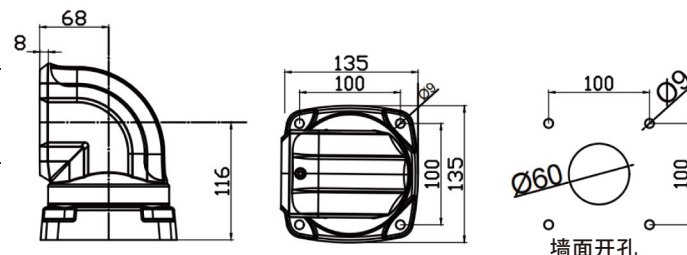

中间连接器 Intermediate hinge




订货号	60.95.330
Model	60.95.330
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

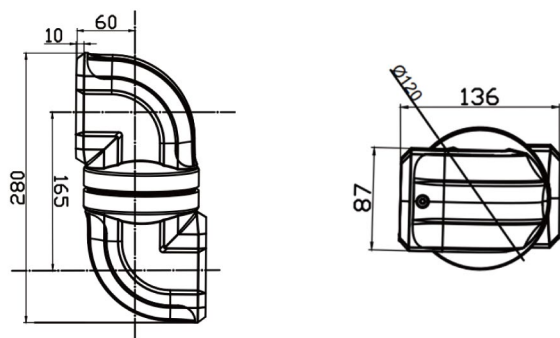

固定底座 Wall/base Mounting Bracket




订货号	60.95.340
Model	60.95.340
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	固定
Angle	Fixed angle

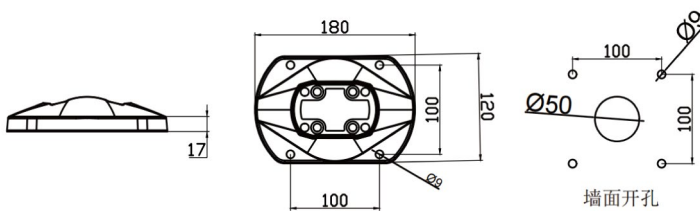

90°箱体连接器 Angel Piece 90°




订货号	60.95.350
Model	60.95.350
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

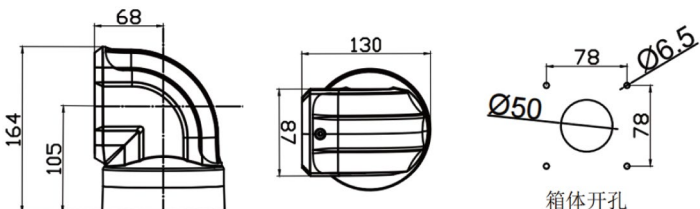

水平墙座 Wall-mounted Hinge




订货号	60.95.360
Model	60.95.360
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

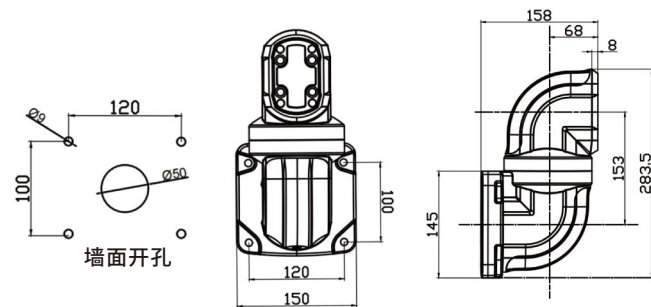

垂直墙座 Wall-mounted Hinge



订货号	60.95.370
Model	60.95.370
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

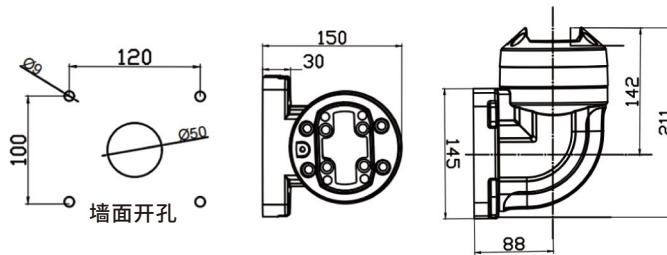


60-95轻型悬臂组件 60-95 Medium cantilever components

旋转底座 Top-mounted Joint




订货号	60.95.380
Model	60.95.380
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated 320°

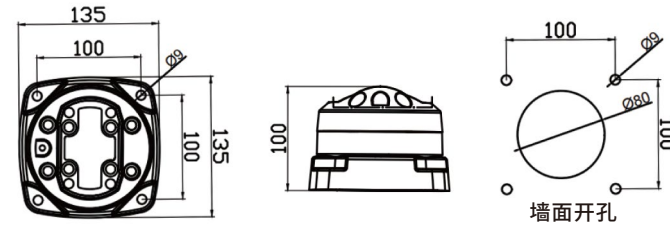

可旋转箱子底座 Rotatable box base




订货号	60.95.381
Model	60.95.380
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated 320°

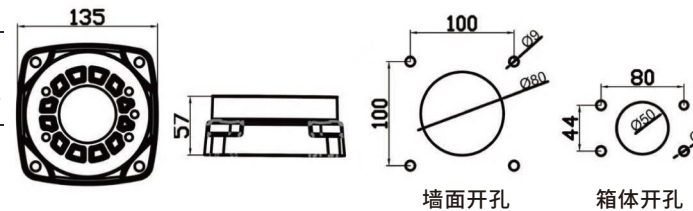

可旋转转角 Rotatable angle




订货号	60.95.390
Model	60.95.390
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated 320°

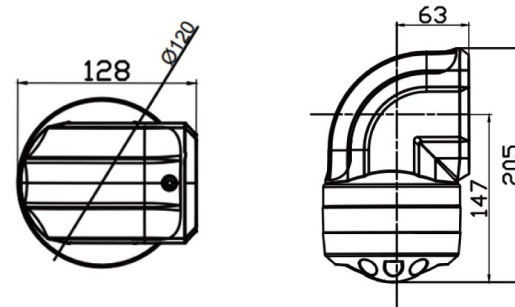

连接管 Support section



订货号	60.95.000
Model	60.95.000
材料	铝管
Material	Aluminum pipe

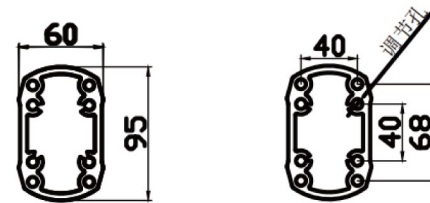


使用调节2个圆头螺钉,根据整个悬臂系统承重不同旋出一定距离(1-5mm),使水平段连接管上抬一定角度。

角度调节器 Rotatable angle




订货号	60.95.030
Model	60.95.030
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	±30°
Angle	Can Be Rotated 30°

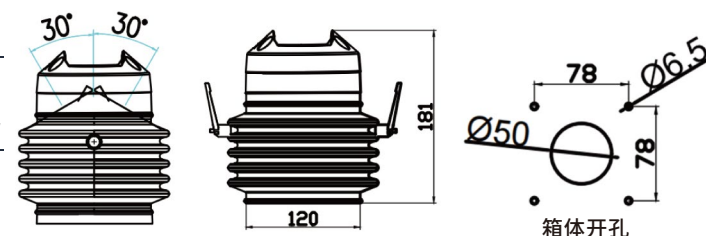

90°角度调节器 90°Rotatable angle




订货号	60.95.035
Model	60.95.035
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	±30°
Angle	Can Be Rotated 30°

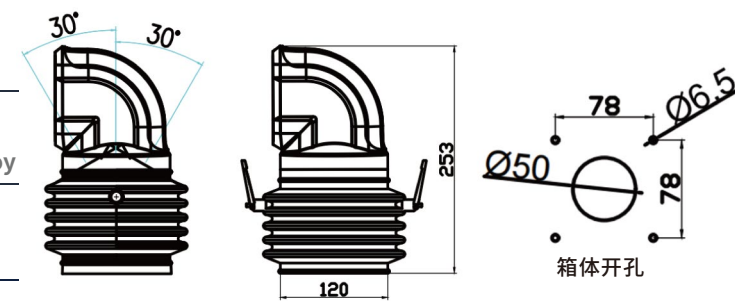

窄边箱体连接器 Enclosure Coupling




订货号	60.95.3091
Model	60.95.3091
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated 320°

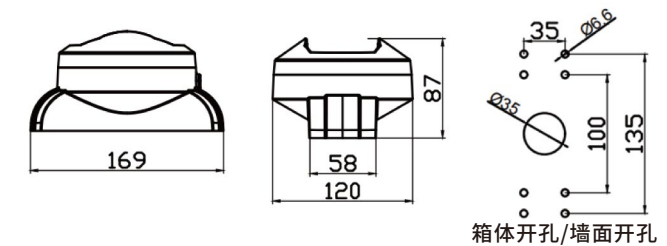

防颤抖箱体连接器 Anti-shake box connector




订货号	60.95.080
Model	60.95.080
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated 320°

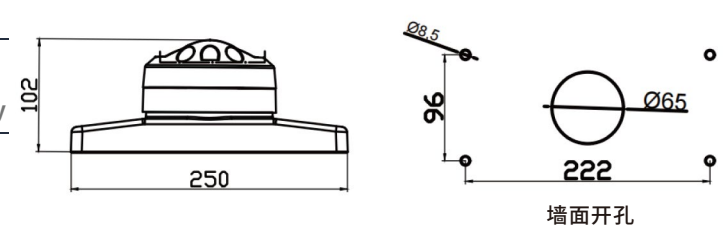

90°防颤抖箱体连接器 90°Anti-shake box connector




订货号	60.95.085
Model	60.95.085
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated 320°

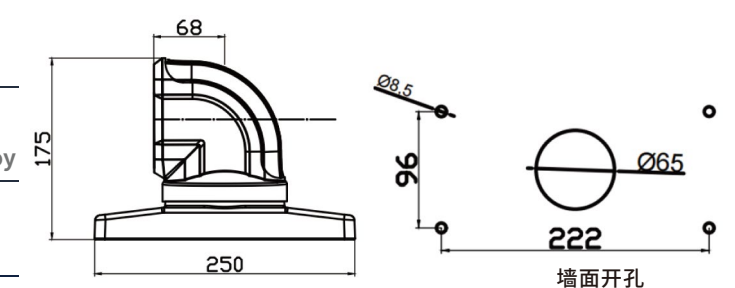


转换器 Adapter



订货号	60.95.50.65
Model	60.95.50.65
材料	压铸铝合金
Material	Die-cast Aluminum Alloy

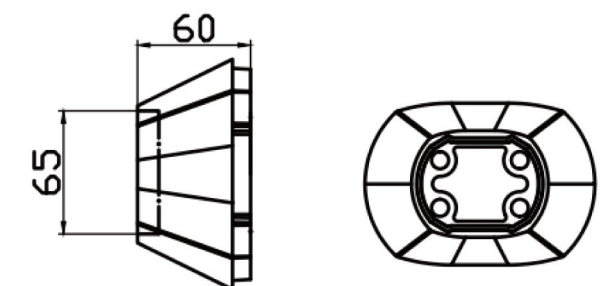

75-110重型悬臂组件 75-110 Heavy cantilever components

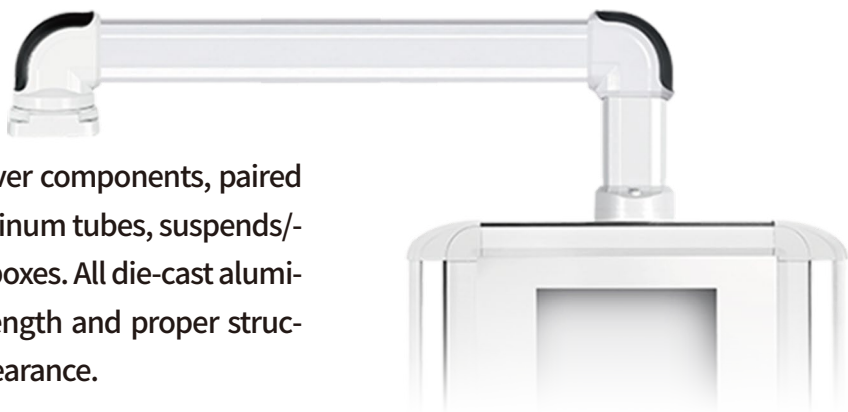


This series of heavy-duty cantilever components, paired with 75x110mm spray-coated aluminum tubes, suspends/supports medium-to-large control boxes. All die-cast aluminum alloy components ensure strength and proper structure, with emphasis on unique appearance.

箱体连接器 Enclosure Coupling




订货号	75.110.5090
Model	75.110.5090
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

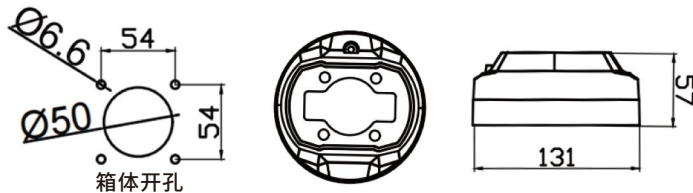

转角 Angle piece 90°




订货号	75.110.510
Model	75.110.510
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	固定
Angle	Fixed angle

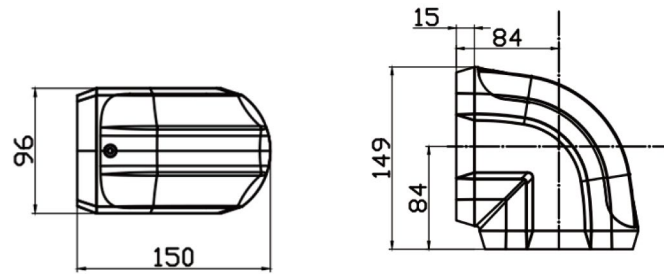

顶座 Top-mounted Joint




订货号	75.110.520
Model	75.110.520
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

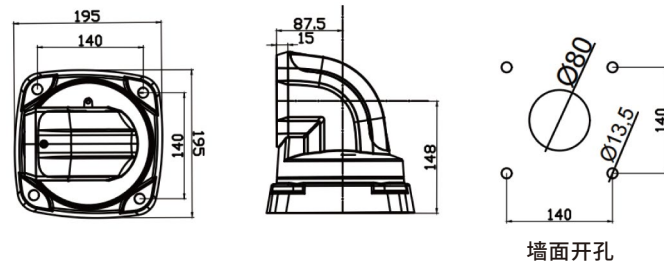

中间连接器 Intermediate hinge




订货号	75.110.530
Model	75.110.530
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

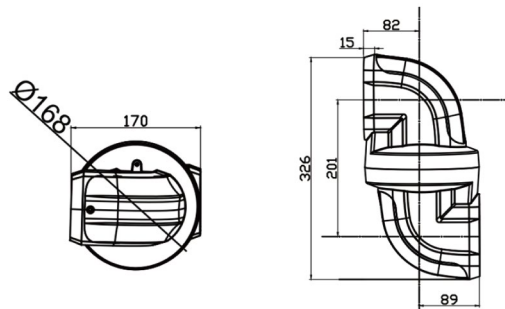

固定底座 Wall/base Mounting Bracket




订货号	75.110.540
Model	75.110.540
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	固定
Angle	Fixed angle

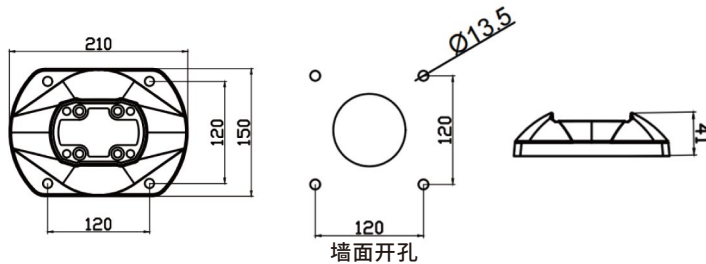

90°箱体连接器 Angel Piece 90°




订货号	75.110.550
Model	75.110.550
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

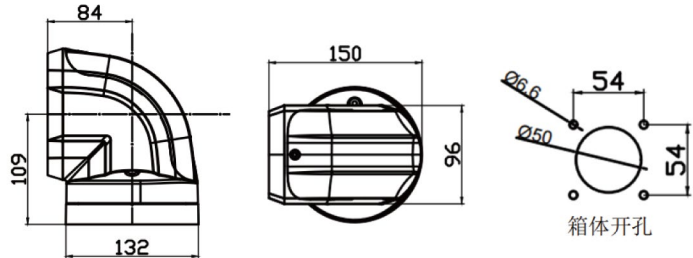

水平墙座 Wall-mounted Hinge




订货号	75.110.560
Model	75.110.560
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

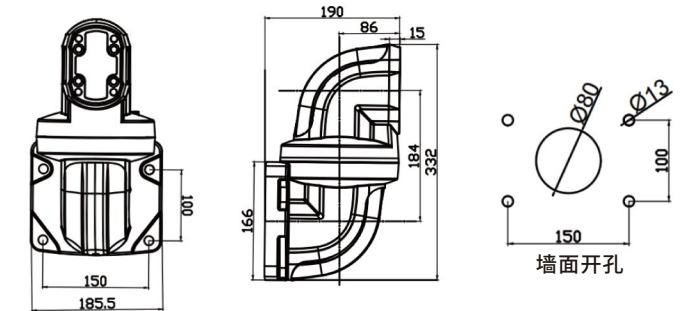

垂直墙座 Wall-mounted Hinge




订货号	75.110.570
Model	75.110.570
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

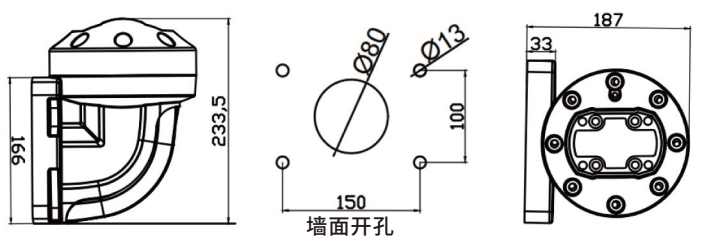

旋转底座 Top-mounted Joint



订货号	75.110.580
Model	75.110.580
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated320°

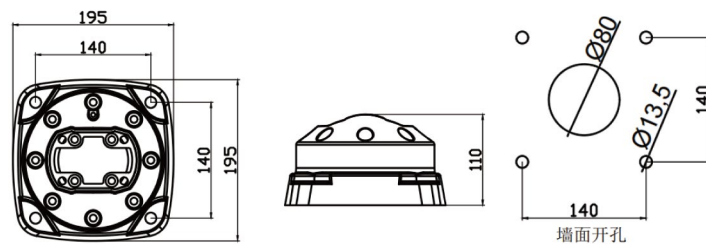


75-110重型悬臂组件 75-110 Heavy cantilever components

可旋转转角 Rotatable angle




订货号	75.110.590
Model	75.110.590
材料	压铸铝合金
Material	Die-cast Aluminum Alloy
旋转角度	0-320°
Angle	Can Be Rotated 320°

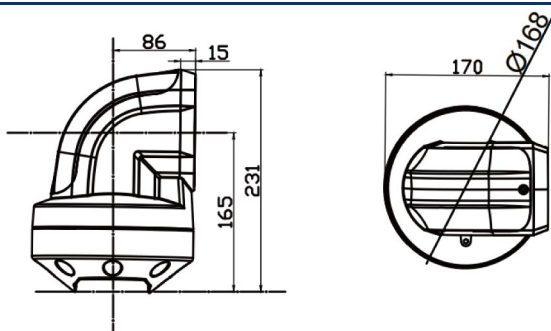

连接管 Support section




订货号	75.110.000
Model	75.110.000
材料	铝管
Material	Aluminum pipe

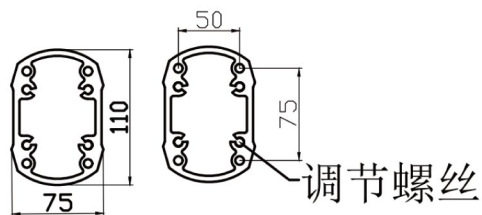

转换器 Adapter



订货号	75.110.60.95
Model	75.110.60.95
材料	压铸铝合金
Material	Die-cast Aluminum Alloy

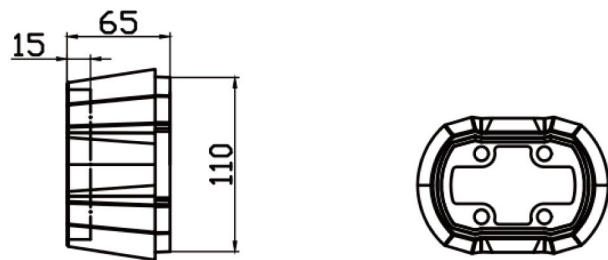

案例展示 Case presentation

